

The Lyset brand steps up to fill the needs of designers and architects that want to provide the best for their clients. With each decision we make as we develop our portfolio, we work to achieve the highest standards of exquisite simplicity and lighting systems. Under the Lyset brand, we choose the best products available, and we are pleased to collaborate with our business clients.

Whether you visit us in our showroom or have already made the decision to integrate our lighting systems with your architectural projects and home designs, we offer a premium experience. When you choose the Lyset brand, we commit that we will develop the solutions we have been searching for to take your home design to the next level.

Are you seeking a customized approach? We are here for you and will help you with any queries you may have. Until you offer the best architectural and design project to your own clients, we will support you along every step of your creative journey.

The Lyset brand offers intelligent lighting solutions for every project, complementing today's smart homes. Most Lyset products are compatible with platforms for managing smart homes on most smartphone apps. When one chooses the Lyset brand, they never have to sacrifice beauty for functionality because all of their ranges are flexible, compatible with smart apps, and customizable to meet any needs that the customer may have.







#### TRIA is the spotlight that doesn't want to be seen.

Designed by Lyset's founder, it features an ultra-thin 3 mm trim - made for projects where visual discretion is key, but lighting quality can't be compromised.

Its optimized optical structure delivers a **UGR** under 9, ensuring visual comfort even in high-brightness environments. And with a CRI of **95**, it renders colors with absolute fidelity – just as they were meant to be seen.

Available in two versions, depending on your lighting needs:

TRIA M - Power 12W × Lumen 850lm × CRI ≥95 × UGR <10

TRIA S - Power 7W × Lumen 540lm × CRI ≥95 × UGR <10

## ZYRO OO

#### Small, Sharp, Versatile.


Zyro is a compact spotlight designed for flexibility across residential and hospitality spaces. Don't be fooled by its size – with **520 lm** and **CRI 95**, it delivers powerful, accurate light where it matters most.

Whether you're aiming for **general lighting** in residential interiors or creating **focused accent light**, Zyro adapts to your design intent. Thanks to its adjustable head, it's ideal for directing light towards **artwork**, **textural surfaces**, or **specific decor elements**.

Pro tip: Always check ceiling height and artwork placement in elevations when setting the beam angle.

- Use a narrow beam to create drama over a coffee table or spotlight a textured corner of the sofa.
- Perfect for **narrow corridors or hallways**, where its compact design avoids visual clutter while subtly guiding movement.
- In dining areas or restaurants, combine Zyro with decorative **pendant lights**: while the pendant sets the mood, Zyro brings functional clarity and adds a second lighting layer to complete the atmosphere.

Power 7W × Lumen 520lm × CRI ≥95 × UGR <12







## SKYFT

#### Focus Where You Need It.

Skift is a height-adjustable recessed spotlight designed to bring precision and control into both residential and commercial spaces. Whether used as a **single accent light** or arranged in a **composed rhythm of multiples**, it offers the flexibility to elevate any corner or focal point.

With its **slim cylindrical** body and minimal design, Skift disappears into the ceiling. Its standout feature lies in its adjustability:

- Lower it to draw attention where needed
- Retract it for a seamless ceiling line and cleaner architectural finish

Ideal for spotlighting artworks, reading nooks, product displays or architectural details, Skift is built for projects where **light shapes** space without taking over.

Power 5W × Lumen 300lm × CRI ≥95 × UGR <19





#### BAT



The BAT spotlight is a high-performance IP54-rated downlight, making it the ideal choice for bathrooms and beyond. It ensures bright and efficient illumination while maintaining a sleek, modern aesthetic. It is also equipped with a dip switch, allowing you to select between 3000K, 3500K or 4000K color temperatures.

Power 12W × Lumen 850lm × CRI ≥90 × UGR <16






#### QUANTUM

Quantum Flat



Quantum Curved



Quantum R Adjustable 🔵 🔾





Quantum S Adjustable



Experience the perfect harmony of power and elegance with the Quantum recessed downlight. This exquisite luminaire delivers an impressive 10W output, a testament to its cutting-edge engineering and it is crafted from the finest pure high-end aluminium.

Power 10W × Lumen 600lm × CRI ≥90 × UGR <10

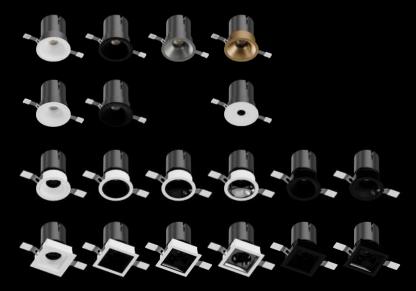

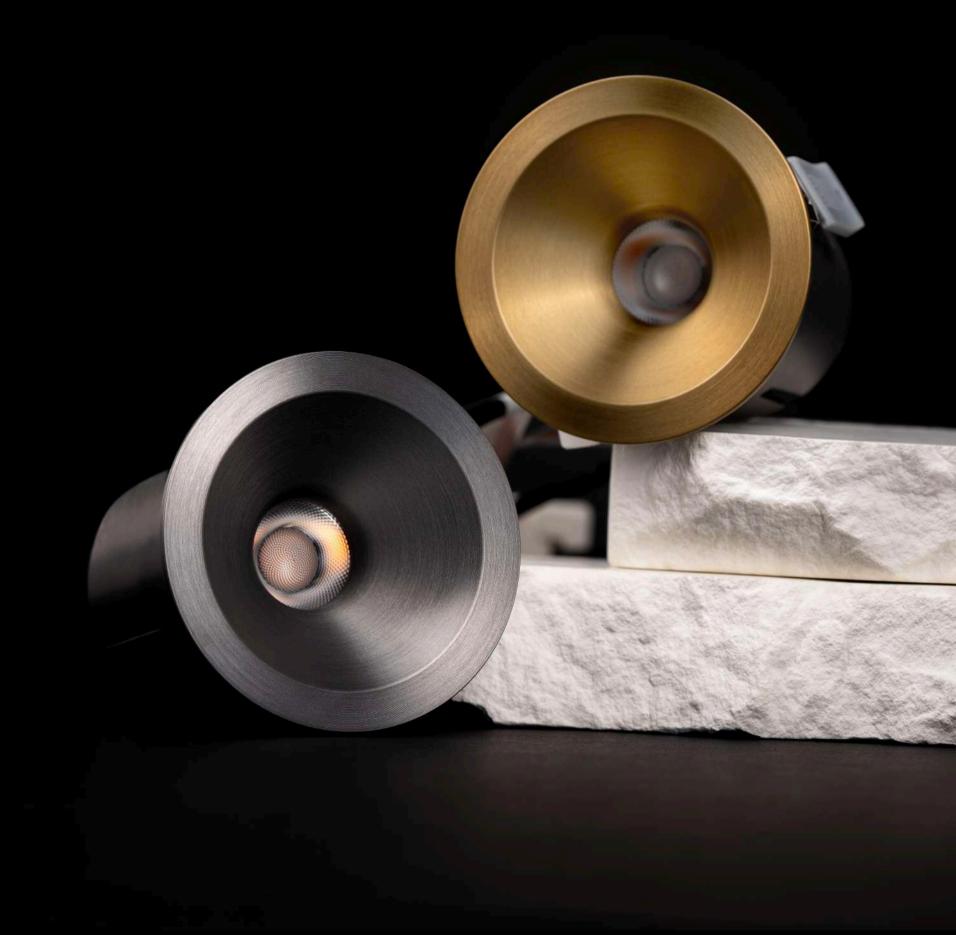

## FALL 2025



#### NOIR



#### Compact. Clean. Powerful.


NOIR is an adjustable downlight that offers both **recessed and trimless** installation options, adapting seamlessly to various architectural needs. Its refined design is available in **both glossy and matte finishes**, allowing it to blend subtly or stand out with intention.

Despite its compact size, NOIR delivers up to **650 lm** with a **CRI 90+** and **UGR <12**, ensuring powerful, glare-free performance in any environment. Whether you're spotlighting key areas or layering ambient light, NOIR brings both **precision and elegance**.

Ideal for high-end residential and commercial applications, where form, flexibility, and lighting quality must coexist effortlessly.

Power **9W ×** Lumen **570lm / 650lm ×** CRI **≥90 ×** UGR **<12** 



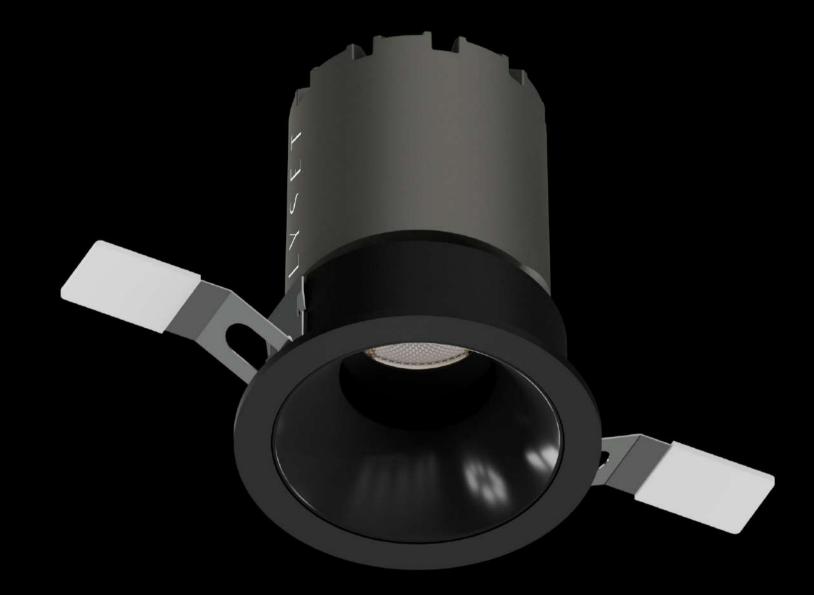



#### Small Diameter. Strong Output.

Flexx is a recessed spotlight available in both **trim and trimless versions**, designed for maximum lighting performance in a
discreet, ultra-compact body. With a **diameter of just 37.5 mm** and
a **height of 70 mm**, it's the ideal solution for spaces with **limited ceiling depth** or where a **clean ceiling line** is desired.

Despite its size, Flexx delivers **575 Im** with **CRI 90** and **UGR <13**, ensuring visual comfort and precise color rendering.

With an **IP54 rating**, it's suitable for both **bathrooms** and **indoor architectural spaces**, offering a powerful, versatile lighting solution across residential and commercial applications.

Power 9W × Lumen 575Im × CRI ≥90 × UGR <13











Power S is a recessed spotlight with an integrated LED, known for its compact size, making it perfect for spaces where discreet and efficient lighting is required. It provides uniform, consistent illumination, suitable for residential, commercial, or workspace environments. Its simple design and small form factor allow it to blend seamlessly into any ceiling.

Power **7W ×** Lumen **500lm ×** CRI **≥90 ×** UGR **<16** 






#### LOKUS PRO







Lokus Pro is a high-performance **surface-mounted spotlight**, built to deliver precise, even illumination with minimal glare (UGR <10). Whether installed as a **single unit** or in **symmetrical double** configurations, it adapts effortlessly to both residential and hospitality interiors.

Its clean cylindrical form and refined finish options allow it to visually integrate or confidently contrast, depending on the design vision. Crafted with premium materials, it balances functionality with understated elegance—ideal for dining areas, lounges, or commercial lobbies.

Power 9W × Lumen 570lm × CRI ≥90 × UGR <10









### WET PRO

#### Bathroom Spots, Reimagined.

Bathroom spotlights don't need to be boring or a design compromise. **Wet Pro** combines IP65-rated protection with a clean, architectural silhouette that elevates even the most moisture-prone spaces.

Whether installed in **bathrooms**, **shower zones**, or other wet areas, it delivers safe, consistent illumination with a high **CRI 90** and **UGR** <19, ensuring visual comfort without sacrificing output. You can also **adjust the color temperature via integrated switch** to suit the mood or function — choose from **3000K**, **3500K**, or **4000K**.

Power 10W × Lumen 764 / 870 / 868lm × CRI ≥90 × UGR <19





#### IVY SURFACE



Introducing Ivy Surface Spotlight, a sleek and versatile lighting solution that mirrors the refined design of the magnetic lvy. This surface-mounted spotlight delivers a powerful output with an impressive lumen performance, all within its slim and elegant profile. Designed for precision, the lvy is fully directional, allowing you to illuminate exactly what matters most, creating tailored lighting effects for any space. Perfect for modern interiors, the lvy Surface Spotlight balances aesthetics, functionality, and performance, elevating any environment it graces.

Power 10W × Lumen 780lm × CRI ≥90 × UGR <16





## FALL 2025

## novelties

### ZOOMABLE O



#### Precision Lighting, On Demand.

Zoomable is a surface-mounted adjustable spotlight with a **manually** tunable beam angle ranging from 15° to 55°. It adapts effortlessly from narrow accent lighting to wide general illumination, making it an ideal choice for ever-changing spatial needs.

Perfect for art displays, paintings, or decorative objects, it allows curators and designers to fine-tune light coverage as the subject evolves—whether the artwork changes size or the layout is rearranged. It's also a powerful tool for creating layered atmospheres in corners, shelves, or featured spaces.

Compact and clean, Zoomable delivers precision without visual noise.

Power 12W × Lumen 857lm × CRI ≥90 × UGR <16



#### GYPSUM D



Gypsum is a recessed spotlight available in **single or double version**, designed to become one with the architecture. Made

from **paintable gypsum**, the fixture can be **fully coated in the same color** as the wall or ceiling, allowing it to disappear visually and preserve clean interior lines.

Compatible with **GU10 light sources**, it offers flexibility in choosing the light output and color temperature.

Power 10W × Lumen 780lm × CRI ≥90 × UGR <16





## ARH 🔘

#### Precision Beams, Designed to Fit.

ARH is built for projects where **lighting precision must be visible**. Its advanced optical system allows you to sculpt light exactly to the shape of a **painting, sculpture, or architectural detail** — with sharp beam clarity and full control.

With a **continuous zoom** from narrow spot to wide flood and **customizable beam shapes** (round, square, rectangular, or even triangular), ARH ensures perfect alignment with the illuminated object — down to the millimeter.

Its high-performance optics maintain visual comfort, while a high CRI ensures vivid, natural color rendering. Ideal for galleries, showrooms, or refined interiors where light must enhance without overwhelming.

The compact body keeps a **clean, minimalist profile**, true to Lyset's design language, while the **magnetic track integration** is quick, modular, and seamless.

When light becomes a precision tool.

Power **8W ×** Lumen **250-300 lm ×** CRI **≥97 ×** UGR **<9** 



## FALL 2025

## novelties

#### ZOOMABLE O



Magnetic Light Zoomable is a zoom-adjustable spotlight designed for seamless integration with the Lyset Magnetic Track System. With a 12W output and a flexible beam angle from 15° to 55°, it shifts effortlessly from focused accent lighting to broad general illumination. This adaptability makes it ideal for highlighting decorative objects or creating tailored atmospheres in any living or display space. Compact and precise, Magnetic Light Zoomable brings targeted control and visual impact to modular lighting setups.

Power 12W × Lumen 857 lm × CRI ≥90 × UGR <16





## LOW PROFILE MTR

#### Designed to Disappear.

We introduced the **Low Profile MTR** for situations where a s**limmer** magnetic track is essential — whether due to **low ceiling heights** or the desire for a **less visible lighting system**.

Created for **surface mounting**, this magnetic profile is part of the **Lyset Magnetic Track System** and supports the same modular flexibility as its larger counterparts. It's the perfect choice for **residential ceilings, compact commercial spaces**, or any interior where clean lines and subtle lighting integration are key.

Minimal form, maximum versatility.






# novelties

### LUV 01 SHALLOW



LUV 01 is a linear LED with an integrated honeycomb that sharply cuts glare for superior visual comfort. It delivers a uniform 110° beam ideal for general lighting in commercial, HoReCa, and residential spaces. High-efficiency LEDs and optimized thermal management provide low power use, stable luminous flux, long life, and minimal maintenance—precise, comfortable light with top performance and efficiency.

Power 12W × Lumen 330lm × CRI ≥90 × UGR <19

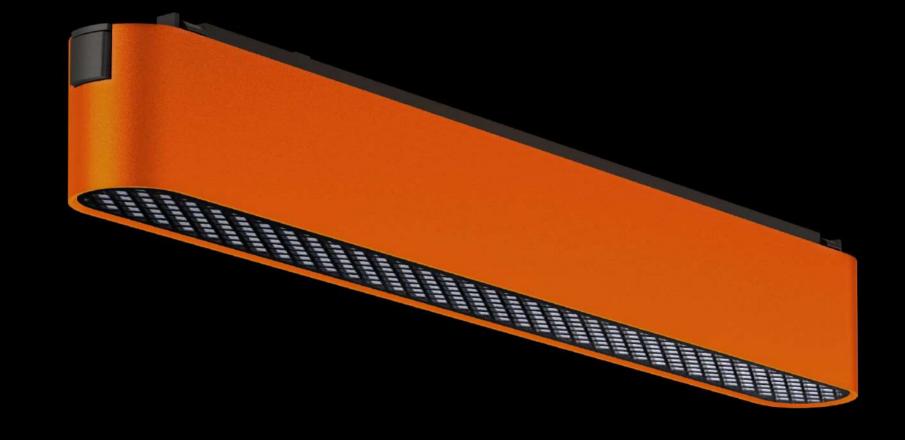

#### LUV02 SHALLOW 🔘

LUV 02 Shallow Honeycomb is the adjustable version of the LUV 01 model, equipped with honeycomb for an exceptionally low glare index. With high-efficiency LED technology, it guarantees low energy consumption while maintaining a consistent and even luminous flux. Its optimized thermal dissipation system enhances durability, reducing the need for frequent maintenance. Thanks to its adjustable mechanism it allows precise light direction adjustment, offering flexibility and versatility to meet various spatial requirements.

Power 12W × Lumen 330lm × CRI ≥90 × UGR <19



### THOR 01 SHALLOW (

A fixed linear LED fixture designed for seamless integration into the Shallow System. With a wide 110° beam angle, it provides uniform light distribution, making it ideal for general lighting in commercial, HoReCa, and residential spaces. Combining a minimalist design with the ability to deliver expansive and even illumination, THOR 01 Shallow is the perfect choice for projects requiring efficient, well-integrated lighting in modern architectural settings.

Power 12W × Lumen 960lm × CRI ≥90 × UGR <19



## THOR 02 SHALLOW

The adjustable version, designed for seamless integration into the Shallow System. With a wide 110° beam angle, it provides uniform light distribution, making it ideal for general lighting in commercial, HoReCa, and residential spaces. Thanks to its adjustable mechanism, THOR 02 Shallow allows precise light direction control, offering flexibility and versatility to meet various spatial needs. This feature makes it the perfect solution for projects requiring adaptable, efficient, and uniform lighting.

Power 12W × Lumen 960lm × CRI ≥90 × UGR <19



## novelties

#### GU10-LIKE BULB

This bulb maintains the standard GU10 diameter, ensuring full compatibility with all GU10-designated fixtures — but with a key advantage: it has a shorter height, making it the ideal solution for installations with limited recess depth.

Despite its size, it delivers an impressive 780 lumens and a CRI of 90, ensuring vibrant, accurate colors and enhanced visual comfort. Ideal when you need better light quality in the same compact format.

Power **7W** × Lumen **750lm** × CRI **>90**Shorter than standard GU10 × Full GU10 fixture compatibility





#### EXTERNAL DRIVER 24V

This external driver features a robust H-type thermal didesign, ensuring stable performance even in demanding environments. Its wide input voltage range of 170–250V reliable operation across diverse electrical conditions.

Engineered for efficiency, it delivers tested performanc 100%, while the semi-potted construction provides end durability and protection without compromising heat m

Built on an LLC constant-current architecture, it maintaconsistent output for superior light stability, and its pur components ensure exceptional conductivity and long-reliability.


A solid choice when your installation demands uncomplete performance in a compact, efficient, and thermally option driver.

Power **60W × 100W × 200W** 



suspensions	Ib	
pendant	34	
wall lamp	42	
9010 system	58	
flexible neon system	86	
magnetic track	98	
track system	122	
downlights	134	
led profiles and lighting sources		







37 RAY PENDANT SURFACE



SUSPENSION LY48-P20W





34

37

SURFACE

DOWN

LY46-P5G

ZEN PENDANT

ZEN PENDANT LY46-P5W







19

26

HAT 50

LY63-P10B

MARBLE

SUSPENSIONS

DUAL

LY62-P30W



22 DUAL LY62-P30B



31 CIRO 600/800/1000











31 CIRO 600/800/1000 LY48-PCW60 LY48-PCW80 LY48-PCW100



35 ZEN PENDANT SIDE LY47-P10G



37 RAY PENDANT SURFACE

## \_wall lamp



42

ZEN

42 ZEN WALL LAMP 60 LY52-W6010G



VENUS 26 LY60-W18G

51

58

GYPSUM

LY67-WGY18

WALL LIGHT



WALL LAMP 60

LY52-W6010B


45 VENUS 26 LY60-W18B

53

GIRO

LY68-WR3B

LIGHT READER



WALL LAMP 90

LY52-W9019G

43

ZEN

48 MARCH LY54-W10W



43

ZEN

WALL LAMP 90

LY52-W9019B



53 GIRO LIGHT READER LY68-WR3W



53 GIRO LIGHT READER LY68-WR3G



VENUS 21 LY60-W12G



45 VENUS 21 LY60-W12G



49 FLY LY55-W3W



49 FLY LY55-W3B



55 ZEN LAMPADAR LY53-F18B

## 9010 system



58

WAY 01

LY9010-1B-350

LY9010-1B-750

WAY 01 LY9010-1G-350 LY9010-1G-750



58 WAY 02 LY9010-2G-350 LY9010-2G-750



58 WAY 02 LY9010-2B-350

LY9010-2B-750






63 WAY 03 LY9010-3G

63 WAY 03 LY9010-3B














HORIZONTAL

HOISTING

flexible neon system

93 PENDANT



64 WAY 04 LY9010-4B

SQUARE LY9010-5B

SQUARE LY9010-5G

RECTANGLE LY9010-6B

72 MALV

LUCE

79

ALMA

FALL

LY9010-8G

LY9010-16G

LY9010-13B

LY9010-9B



75

78

83

SPARK

LY9010-7G

LINE

LY9010-11B

75



75







72

DREAM





78

GLOBE

SPARK

LY9010-7B


LY9010-15B

LINE

LY9010-11G







99

106

IVY

109

THOR 03

LY-MTR-7-7B

LY-MTR-10-P1B

RECESSED

LY-MTR2BR

87

DOUBLE

HEAD CEILING







MAGNETIC PROFILE

LY-MTR-2WS

106

IVY

LY-MTR-10-P1GB



SURFACE

LY-MTR-2BS

109

THOR 01

LY-MTR-15-1B





IVY LY-MTR-10-P1GW

75 LUCE LY9010-13G

76 ERA LY9010-12G

81

TWIST

LY9010-17G





TWIST

LY9010-17B













106

IVY

LY-MTR-10-P1WB

99

MAGNETIC PROFILE MAGNETIC PROFILE

RECESSED

LY-MTR2WR

\_magnetic track











109

THOR 01

LY-MTR-15-1W



109 THOR 02 LY-MTR-12-2B



FALL LY9010-8B

79

ALMA

LY9010-16B

83



109



THOR 03 LY-MTR-7-7W



110 LUV 01 LY-MTR-12-3B



110 LUV 02 LY-MTR-12-4B



111 ELM LY-MTR-20-P2B



116 MOON LY-MTR-8-B1













129

LY-TR-LECB



129

"L" connector

LY-TR-LCB





114 RAY LY-MTR-P-7BG

114 RAY LY-MTR-P-7W

114 RAY LY-MTR-P-7B



119 Input module LY-MTR-IMCB LY-MTR-IMCW







Live end connector

Live end connector

"L" connector

LY-TR-LCW

129

129 "T" connector LY-TR-TCW

"T" connector LY-TR-TCB

129

119 "L" connector for surface LY-MTR-LCSB

LY-MTR-LCSW

119 "L" connector for recessed LY-MTR-LCRB LY-MTR-LCRW

123 Ceiling-wall connector for surface LY-MTR-CWSB LY-MTR-CWSW

Ceiling-wall connector LY-MTR-CWRB LY-MTR-CWRW

119 Endcap surface LY-MTR-ECSB LY-MTR-ECSW

Endcap recessed LY-MTR-ECRB

LY-MTR-ECRW

129 Linear connector LY-TR-ICW

129

LY-TR-LECW

129 Linear connector LY-TR-ICB



119 In track driver LY-INTRACK100 LY-INTRACK250



119 Linear mechanic recessed connector LY-MTR-ICR



surface connector LY-MTR-ICSW LY-MTR-ICSB



119 Linear mechanic

## downlights



ARM LY11-GU10B

140

RIN

146

KID00S

LY59-SM5W

LY12-GU10W



135 ARM LY11-GU10W



136 TUBE LY30-GU10W



138 FOLD 8,5 LY10-12B



138

FOLD 12

LY10-18W

LOKUS



140 RIN LY12-GU10B

## track system



122 Track rail LY-TR2W



122 Track rail LY-TR2B

LY27-TRGU10GW



122 KER LY13-TRGU10W



122 KER LY13-TRGU10B



ARM LY11-TRGU10W



125 ARM LY11-TRGU10B



128 SIDE



140 PLUMP LY28-GU10B



140 PLUMP LY28-GU10W



142 LOKUS LY26-GU10G



142 LOKUS LY26-GU10W LY26-GU10B





126 LOKUS LY27-TRGU10W





126 LOKUS LY27-TRGU10B



126 LOKUS LY27-TRGU10GB



LY19-TR15B



146 KIDOO S LY59-SM5G



146 KID00S LY59-SM5B



KIDOO M LY59-SM10W





147 KIDOO M LY59-SM10G



147 KIDOO M LY59-SM10B



148 WETS LY36-GU10B



148

152

EYE

WETR

LY35-GU10B



148

WETR LY35-GU10W



151 RAV CEILING 40 LY61-C4030B



160 EIKO LY45-GU10CB



160 EIKO LY45-GU10CWB



160 EIKO LY45-GU10CBG



161

DEEP

LY16-10RECW

163 EYE TRIM LY14-GU10RECW



163 EYE TRIM LY14-GU10RECB






**RAV CEILING 60** LY61-C6050B



151 RAV CEILING 60 LY61-C6050W



LY26-GU10RECW



152 EYE LY26-GU10RECB



153 EYE DUO LY26-2GU10RECW



164 FLEX TRIMLESS LY56-9TRMW



167

GYPSUM

LY64-DGY100

167 GYPSUM SPOTLIGHT A SPOTLIGHT B LY65-DGY120



167 GYPSUM SPOTLIGHT C LY66-DGY100



153 EYE DUO LY26-2GU10RECB



154 MINI LY17-5RECW



154 **ATOM 8,5** LY18-8RECW

157

HONEY 8,2

LY25-10RECW



156 ORA LY31-10RECW



156 ORA LY31-10RECB



156 POWER LY20-12RECW



171 PROFILES LY-LPR15

173

SURFACE LED

PROFILE 8

LY-LPS8x7-200W




172 LED STRIP LY-SL4



173 SURFACE LED PROFILE LY-LPS17W




173 SURFACE LED **PROFILE** LY-LPS17B



173

173 SURFACE LED PROFILE 12







173

EXTERNAL CORNER RECESSED LED PROFILE

156 157 POWER HONEY 5,5 LY20-12RECB LY25-5RECW



158 158 TICK M TICK M LY58-P9RECB LY58-P9RECG



158 TICK M LY58-P9RECW



157 HONEY 8,5 LY23-7RECB

159

TICK S

LY58-P5RECB





PICK LY57-10RECB

159

TICKS



158

PICK

LY57-10RECW

LY58-P5RECGB



159 TICK S LY58-P5RECW

## led profiles and lighting sources



RECESSED LED





173 SURFACE LED PROFILE 8

LY-LPS8x7-200



173 SEMI-RECESSED LED PROFILE LY-LPSR11B



173 SEMI-RECESSED LED PROFILE LY-LPSR11W




173 INTERNAL CORNER RECESSED LED PROFILE LY-LPR-INT

LY-LPR-EXT


12 | L Y S E T





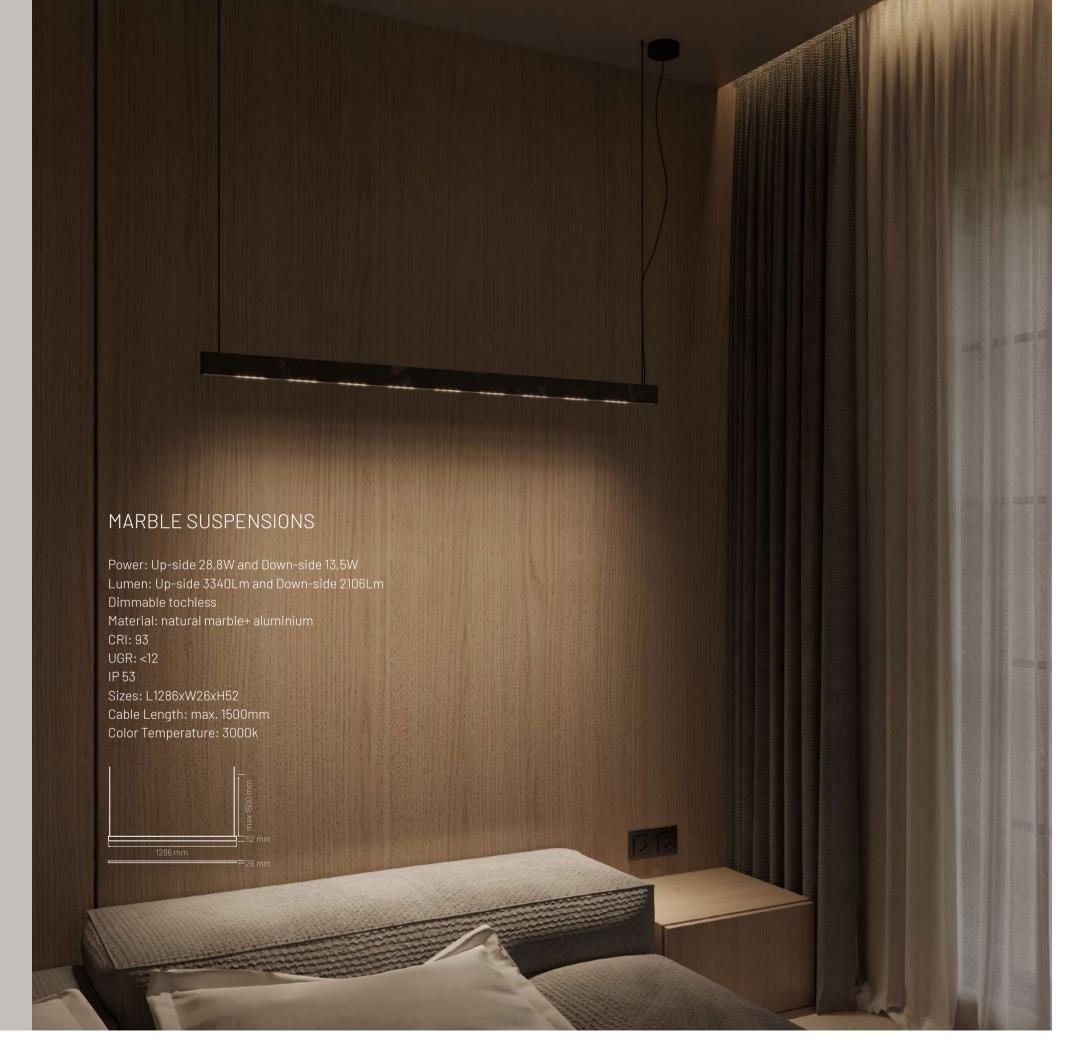



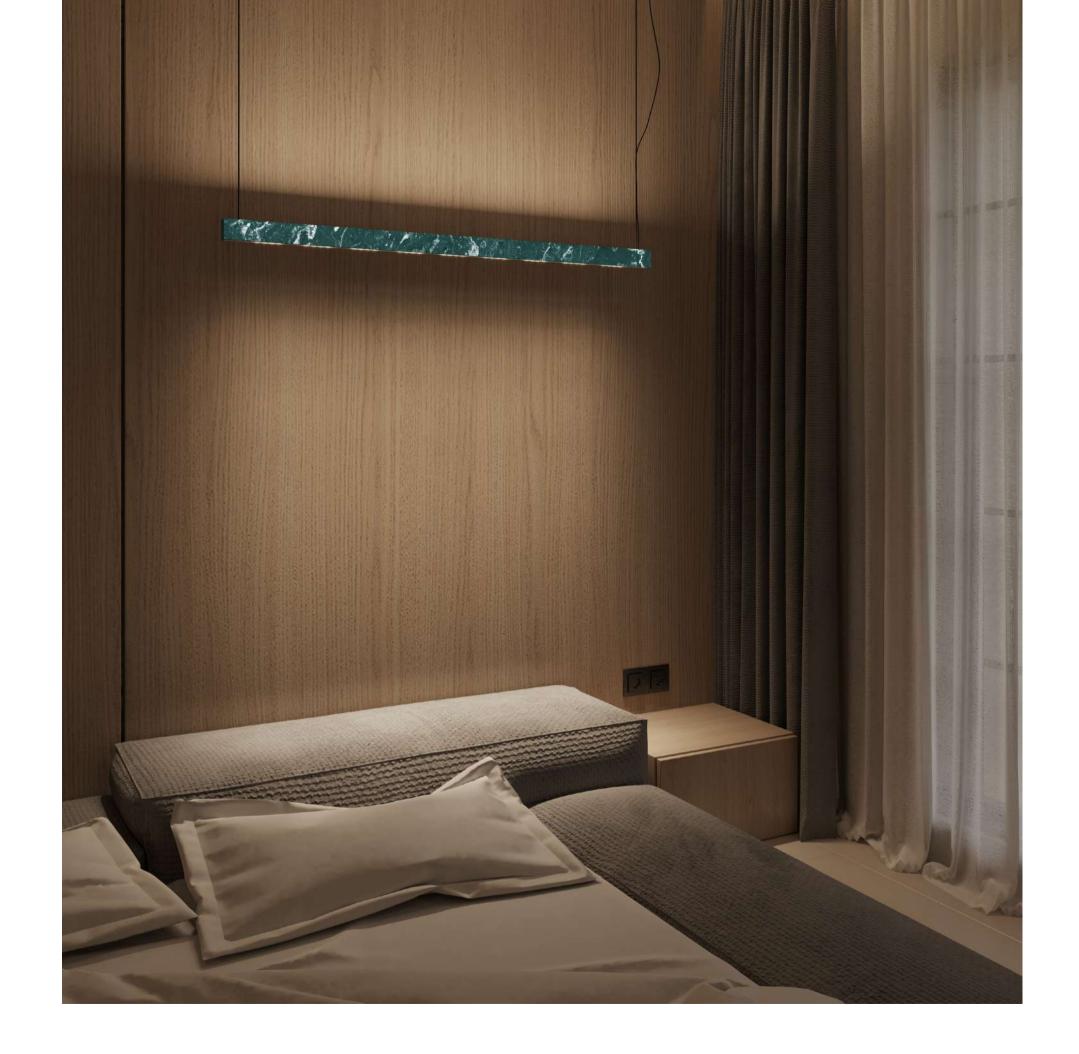




Light, whether natural or artificial, is an essential material. It creates mood, enhances textures, and makes a space feel alive

20 | L Y S E T lighting catalogue | 21



LY62-P30B Sandy black with black reflector



LY62-P30W Sandy White with black reflector

#### DUAL

Power: 30W Lumen: 1500lm IP20

CRI: >90 UGR<19 Dimmable

Up/down or up and down simultaneously, switch by button 2700k/3000k/4000k change by button, individually for up and

Dimensions: W25\*H80\*L1210mm

Cable length: 1500mm Material: Aluminium







The light is what guides you home, the warmth is what keeps you there



26 | L Y S E T lighting catalogue | 27





#### CIRO 600

Sizes: Ø600 X W10 X H55 mm


Power: 40W Lumen: 2800lm Driver: On/Off

Material: Aluminium

CRI: >90

Cable Length: max. 1500mm

Black: LY48-PCB60 White : LY48-PCW60 Gold: LY48-PCG60



#### CIRO 800

Sizes: Ø800 X W10 X H55 mm

Power: 48W Lumen: 3360Lm Driver: On/Off


Material: Aluminium

CRI: >90

Cable Length: max. 1500mm

IP20

Black: LY49-PCB80 White : LY49-PCW80 Gold: LY49-PCG80



#### CIRO 1000

Sizes: Ø1000 X W10 X H55 mm

Power: 55W Lumen: 3800Lm Driver: On/Off Material: Aluminium

CRI: >90


Cable Length: max. 1500mm

IP20


Black: LY50-PCB100 White : LY50-PCW100 Gold: LY50-PCG100









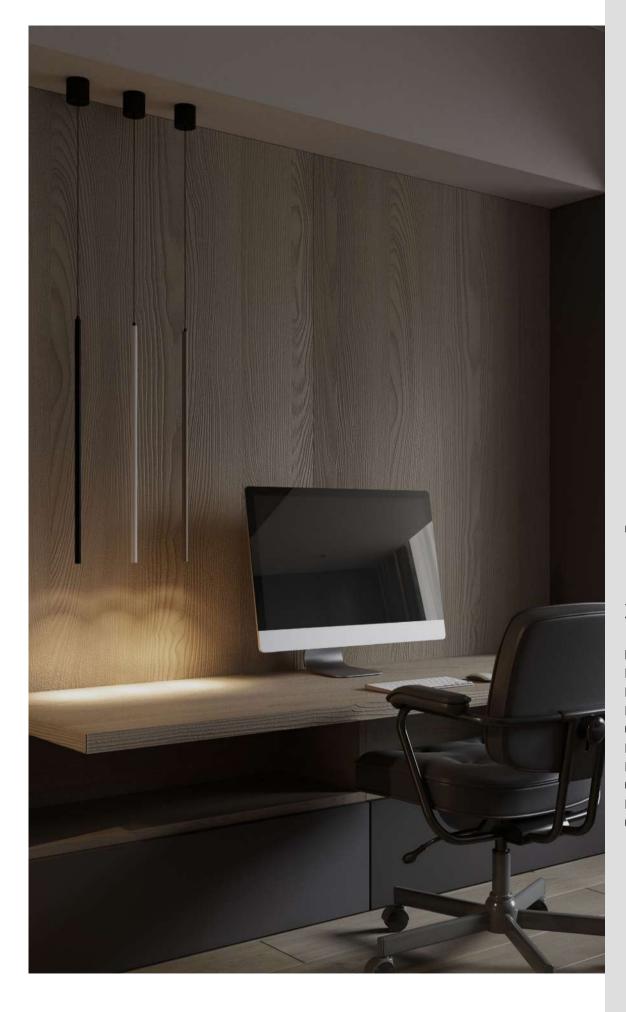




## ZEN PENDANT DOWN

Power: 5W
Lumen: 250Lm
Driver: On/Off
Material: Aluminium
CRI: >90
Length: 600mm
Diameter: 15mm
Cable Length: max. 2000mm
IP20
Color Temperature: 3000k



## ZEN PENDANT SIDE

Power: 10W
Lumen: 500Lm
Driver: On/Off
Material: Aluminium
CRI: >90
IP20
Length: 600mm
Diameter: 15mm
Cable Length: max. 2000mm
Color Temperature: 3000k

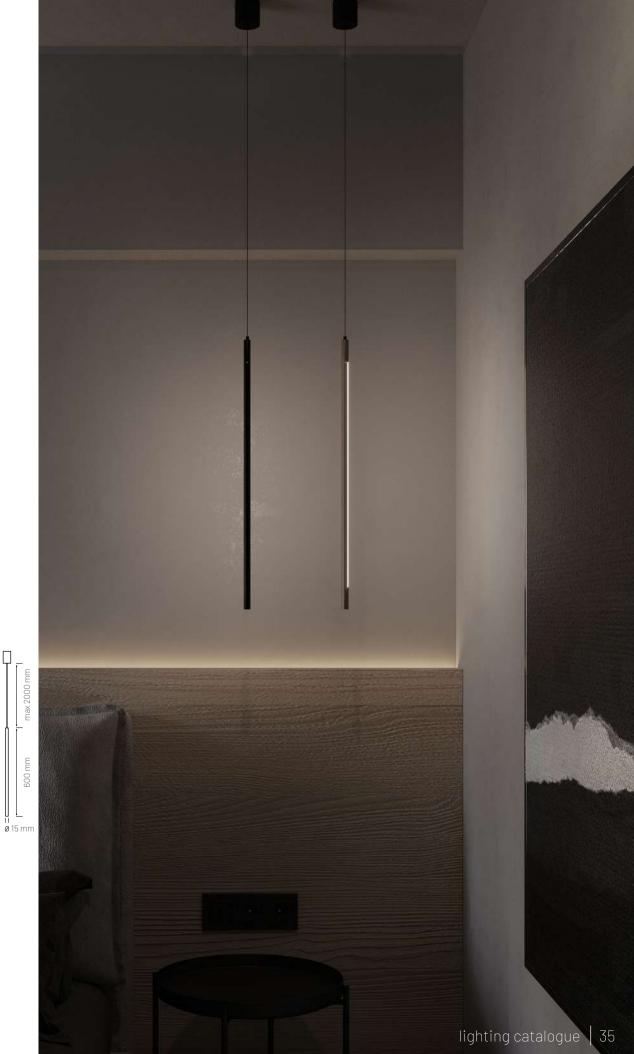













## RAY PENDANT SURFACE

Driver: On/Off Material: Aluminium CRI: >90 Cable Length: max. 1500mm

See the website for full details and specifications.









# ZEN WALL LAMP 90


Watt: 19W Lumen: 373Lm Material: Aluminium IP44

Color Temperature: 3000k

CRI: >90 Driver: On/off

Sizes: of the tube: Ø15mmX H900X W73













LY60-W12B



Material: Aluminium Color: Brushed Black Power: 12W Lumen: 480lm IP44 Size: ø21cm Driver: on/off










VENUS 26

Material: Aluminium Color: Gold Leaf Power: 18W Lumen: 720lm IP44 Size: ø26cm Driver: on/off







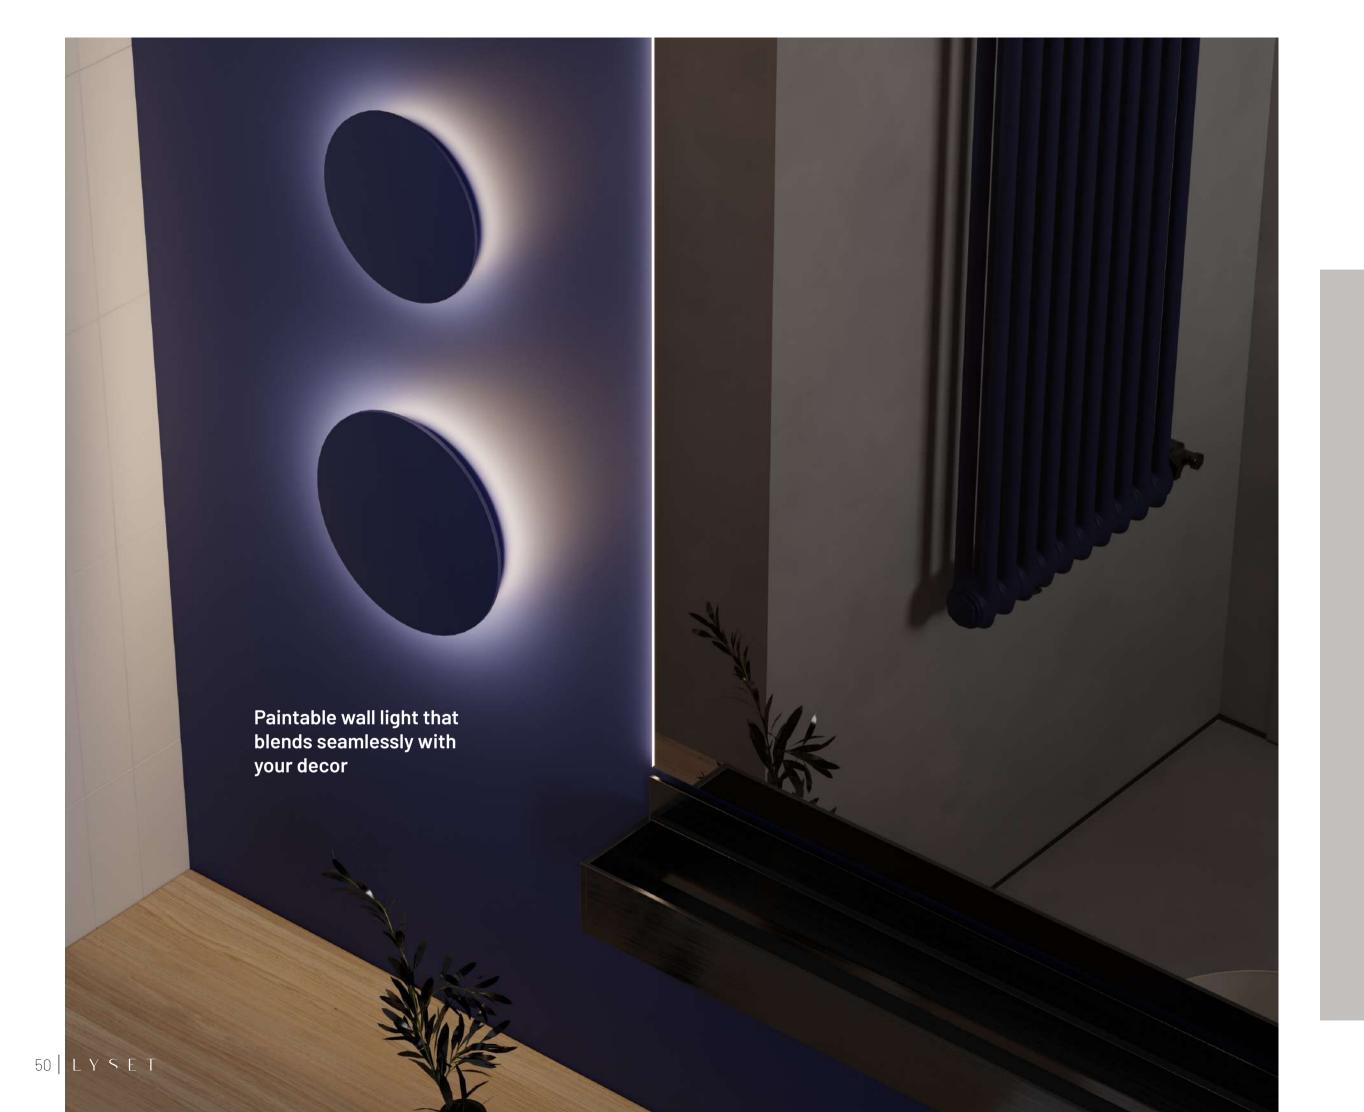



#### GYPSUM WALL LIGHT 18

Material: Gypsum Diameter: 180mm

Color Temperature: 3000k Driver: On-off

Power: 12W IP: 20

LY67-WGY18



#### GYPSUM WALL LIGHT 25


Material: Gypsum Diameter: 250mm

Color Temperature: 3000k

Driver: On-off Power: 12W IP: 20

LY67-WGY25



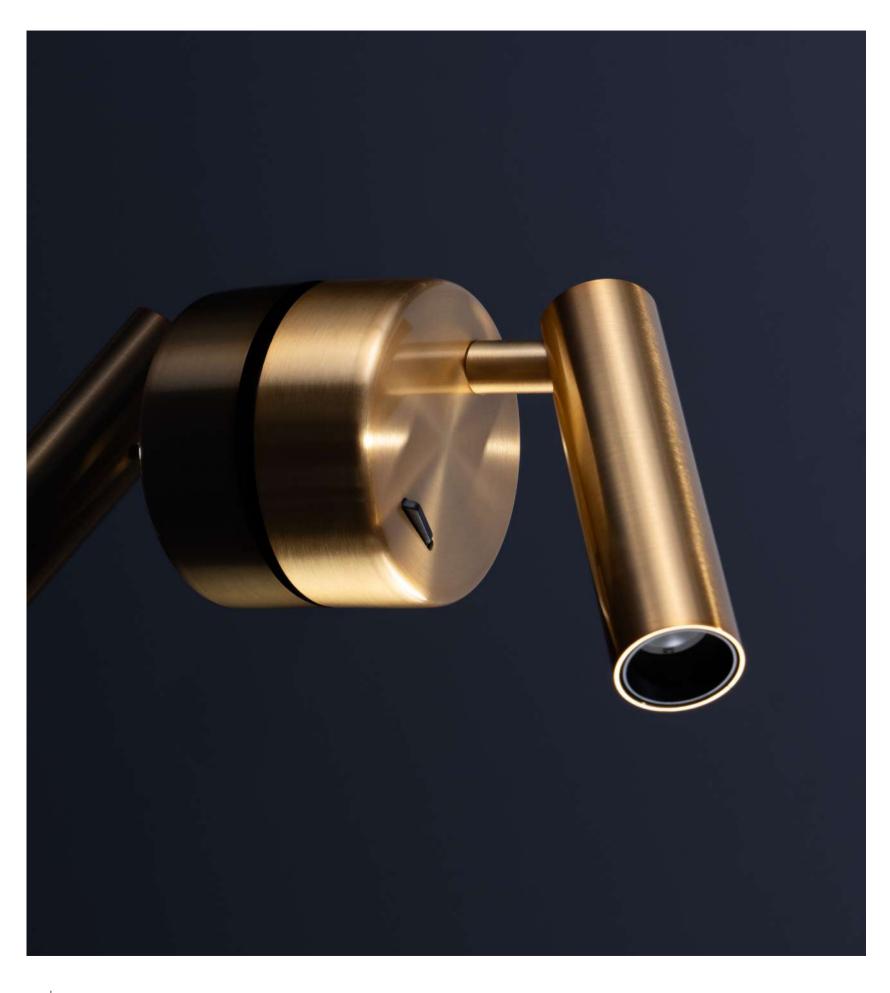



## ZEN LAMPADAR


LY53-F18B

Putere: 18W Culoare: Negru Mat

Material: Aluminiu

CRI: >90 Diametru: 15mm Lungime: 1500mm



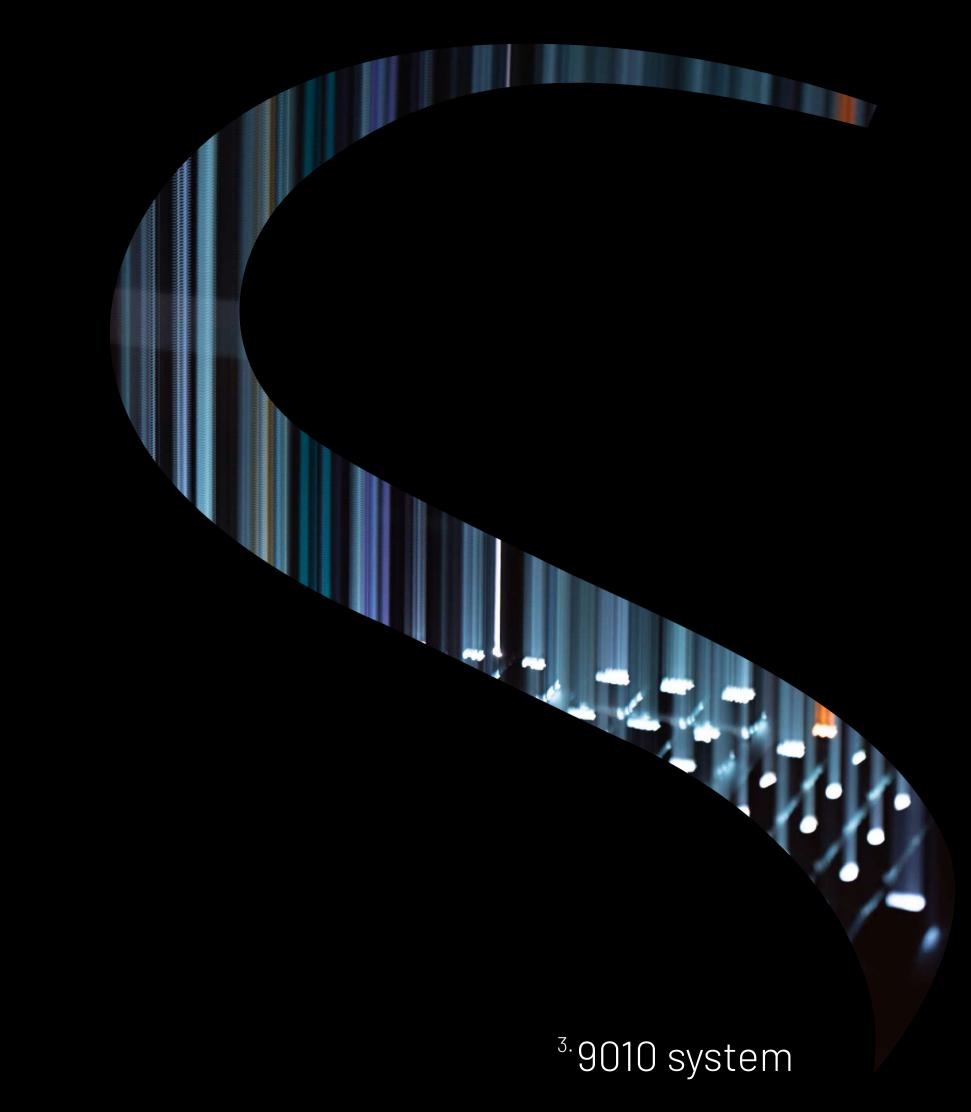



#### WAY 01

Sandy Black Aluminium Brass Gold Aluminium Meanwell 60W Driver included

Volt: DC24V IP20

Driver: ON-OFF

Dimensions: L1500xH350/750mm Compatible with all 9010 Lights.

Gold H350mm: LY9010-1G-350 H750mm: LY9010-1G-750

Black H350mm: LY9010-1B-350 H750mm: LY9010-1B-750



#### WAY 02

Sandy Black Aluminium Brass Gold Aluminium

Meanwell 60W Driver included Volt: DC24V


IP20

Driver: ON-OFF

Dimensions: L2000xH350/750mm Compatible with all 9010 Lights.

Gold H350mm: LY9010-2G-350 H750mm: LY9010-2G-750

Black H350mm: LY9010-2B-350 H750mm: LY9010-2B-750














#### WAY 03

Sandy Black Aluminium Brass Gold Aluminium Meanwell 100W Driver included Volt: DC24V IP20 Driver: ON-OFF Dimensions: L3000xH350mm

Compatible with all 9010 Lights.








## WAY 04

Sandy Black Aluminium
Brass Gold Aluminium
Meanwell 150W Driver included
Volt: DC24V

IP20


Driver: ON-OFF


Dimension: L4000xH350mm Compatible with all 9010 Lights.








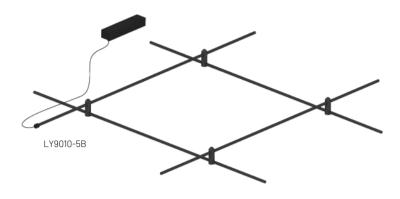

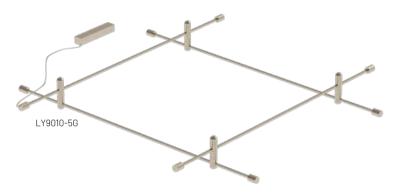

## SQUARE


Sandy Black Aluminium Brass Gold Aluminium Meanwell 100W Driver included Volt: DC24V IP20 Driver: ON-OFF Dimension: 1500x1500mm Choose your pipe for height 100, 300, 700 Compatible with all 9010 Lights.





Using various pipe lengths, adjust the resulting product's geometry



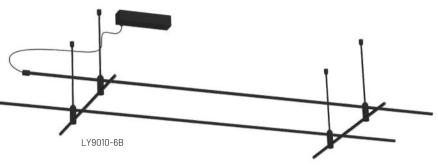


## RECTANGLE

Sandy Black Aluminium Meanwell 100W Driver included

Volt: DC24V IP20

Driver: ON-OFF

Dimension: L2000xW800xH405mm Compatible with all 9010 Lights.







## MALV


Sandy Black Aluminium Brass Gold Aluminium

Volt: DC24V IP20 Watt: 5W Lumen: 300Im



Kelvin: 3000K Driver: 0N-0FF

Dimension: Ø60xH100mm

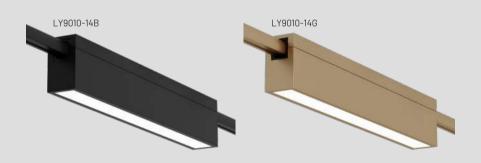

## DREAM

Sandy Black Aluminium Brass Gold Aluminium

Volt: DC24V IP20 Watt: 10W

Watt: 10W Lumen: 700Im Kelvin: 3000K Driver: 0N-0FF

Dimension: L250xW26xH44mm







## LINE

Sandy Black Aluminium Brass Gold Aluminium

Volt: DC24V IP20 Watt: 5W

Lumen: 300lm Kelvin: 3000K Driver: ON-OFF

Dimension: Ø30xH160mm






# LUCE

Sandy Black Aluminium Brass Gold Aluminium Volt: DC24V

IP20 Watt: 5W Lumen: 600lm Kelvin: 3000K

Driver: ON-OFF Dimension: Ø32xH130mm







ERA

Sandy Black Aluminiu Brass Gold Aluminium Volt: DC24V IP20

Watt: 5W Lumen: 600lm Kelvin: 3000K Driver: ON-OFF

Dimension: Ø49xH100mm









GLOBE

Sandy Black Aluminium Brass Gold Aluminium Volt: DC24V

IP20

Watt: 5W Lumen: 500lm Kelvin: 3000K

Driver: ON-OFF Dimension: Ø100xH130mm





ALMA


Sandy Black Aluminium Brass Gold Aluminium Volt: DC24V

IP20

Watt: 8W


Lumen: 400lm Kelvin: 3000K

Driver: ON-OFF Dimension: Ø50xH260mm









## TWIST

Sandy Black Aluminium

Brass Gold Aluminium Volt: DC24V

Watt: 22W

Lumen: 1125lm

Driver: ON-OFF

Dimension: max. length 1500mm





#### SPARK

Sandy Black Aluminium Brass Gold Aluminium

Volt: DC24V IP20 Watt: 5W Lumen: 300lm

Kelvin: 3000K Driver: ON-OFF

Dimension: Ø120xH720mm



## FALL

Sandy Black Aluminium Brass Gold Aluminium Volt: DC24V

IP20 Watt: 5W Lumen: 300lm Kelvin: 3000K

Driver: ON-OFF

Dimension: Ø30xH660mm







# DOUBLE HEAD CEILING

Power/m: 14,4W

Lumen/m: 1300lm for 3000K & 1450lm for 4000K

Volt: 24V

Kelvin: 3000K/4000K

Max. Length 5 meters/1 electricity wire circuit





### HORIZONTAL HOISTING

Power: 21,6W

Lumen: 1950lm for 3000K & 2175lm for 4000K

Volt: 24V

Kelvin: 3000K/4000K

Dimensions: Ø 24x1500mm / Ø 24x1000mm

Cable length: max. 1500mm





### PENDANT

Power: 14,4W

Lumen: 1300lm for 3000K & 1450lm for 4000K

Kelvin: 3000K/4000K Dimensions: Ø 24x1000mm Cable length: max. 1500mm



Power/m: 14,4W

Lumen/m: 1300lm for 3000K & 1450lm for 4000K

Volt: 24V

Kelvin: 3000K/4000K

Max. Length 5 meters/1 electricity wire circuit













### Recessed Magnetic profile

Sandy Black Aluminium Sandy White Aluminium IP20

Recess Application Length: 2000mm Width: 31,8mm

Recessed Width: 72mm


Height: 55mm





# Surface magnetic profile

Sandy Black Aluminium
Sandy White Aluminium
IP20
Surface or Pendant Application
Length: 2000mm
Width: 26,4mm
Height: 53mm











102 | L Y S E T lighting catalogue | 103



104 L Y S E T lighting catalogue |105





# LYSET

### THOR 01

Sandy Black Aluminium Sandy White Aluminium

Watt: 15W Volt: DC48V Lumen: 750Lm Beam Angle: 110°

CRI: ≥90


Kelvin: 3000K/4000K

IP20

Driver: ON-OFF

Upon request 0-10V, Zigbee or Dali

Dimension: L600\*22\*25







Sandy Black Aluminium

Watt: 12W Volt: DC48V Lumen: 750Lm Beam Angle: 110° CRI: ≥90 Kelvin: 3000K

IP20

Driver: ON-OFF

Upon request 0-10V, Zigbee or Dali Dimension: L219\*22\*106





### THOR 03

LY-MTR-15-1W

Sandy Black Aluminium Sandy White Aluminium

Watt: 15W
Volt: DC48V
Lumen: 750Lm
Beam Angle: 110°
CRI: ≥90

Kelvin: 3000K/4000K


IP20


Driver: ON-OFF

Upon request 0-10V, Zigbee or Dali

Dimension: L300\*22\*25



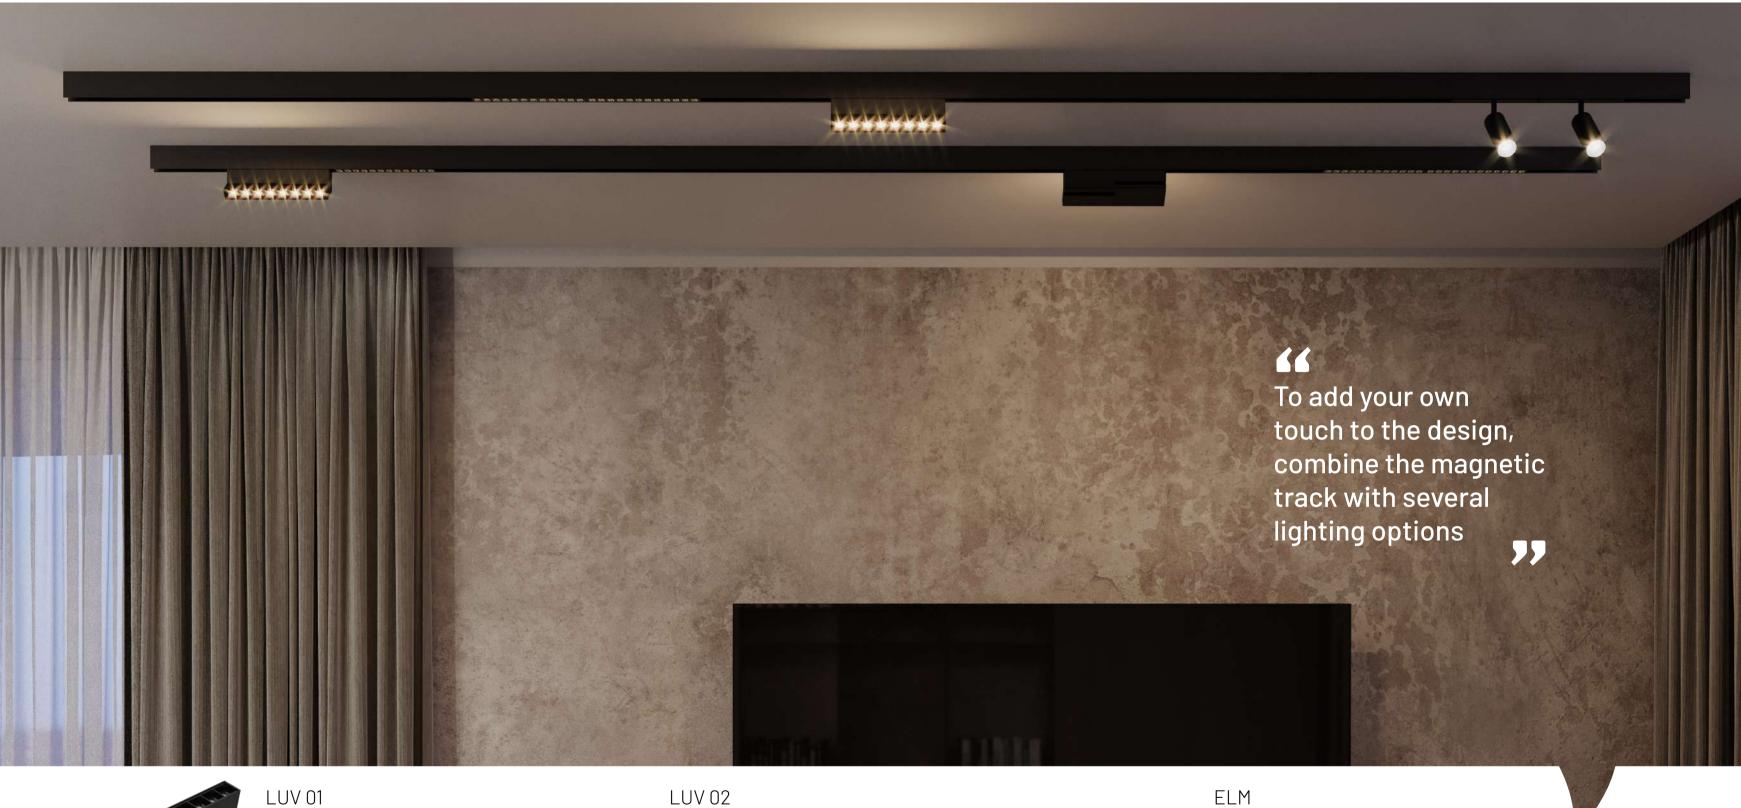



Sandy Black Aluminium

Watt: 12W Volt: DC48V Lumen: 750Lm Beam Angle: 38° CRI: ≥90

Kelvin: 3000K IP20


Driver: ON-OFF

Upon request 0-10V, Zigbee or Dali

Dimension: L220\*22\*43



LY-MTR-12-4B



Sandy Black Aluminium

Watt: 12W Volt: DC48V Lumen: 750Lm Beam Angle: 38° CRI: ≥90 Kelvin: 3000K

IP20

Driver: ON-OFF

Upon request 0-10V, Zigbee or Dali Dimension: L220\*22\*98

LY-MTR-20-P2B


Sandy Black Aluminium Watt: 20W Volt: DC48V Lumen: 1400Lm Beam Angle: 38° CRI: ≥90

Kelvin: 3000K

IP20 Driver: ON-OFF


Upon request 0-10V, Zigbee or Dali

Dimension: Ø53\*L130





" Architecture is the learned game, correct and magnificent, of forms assembled in the light

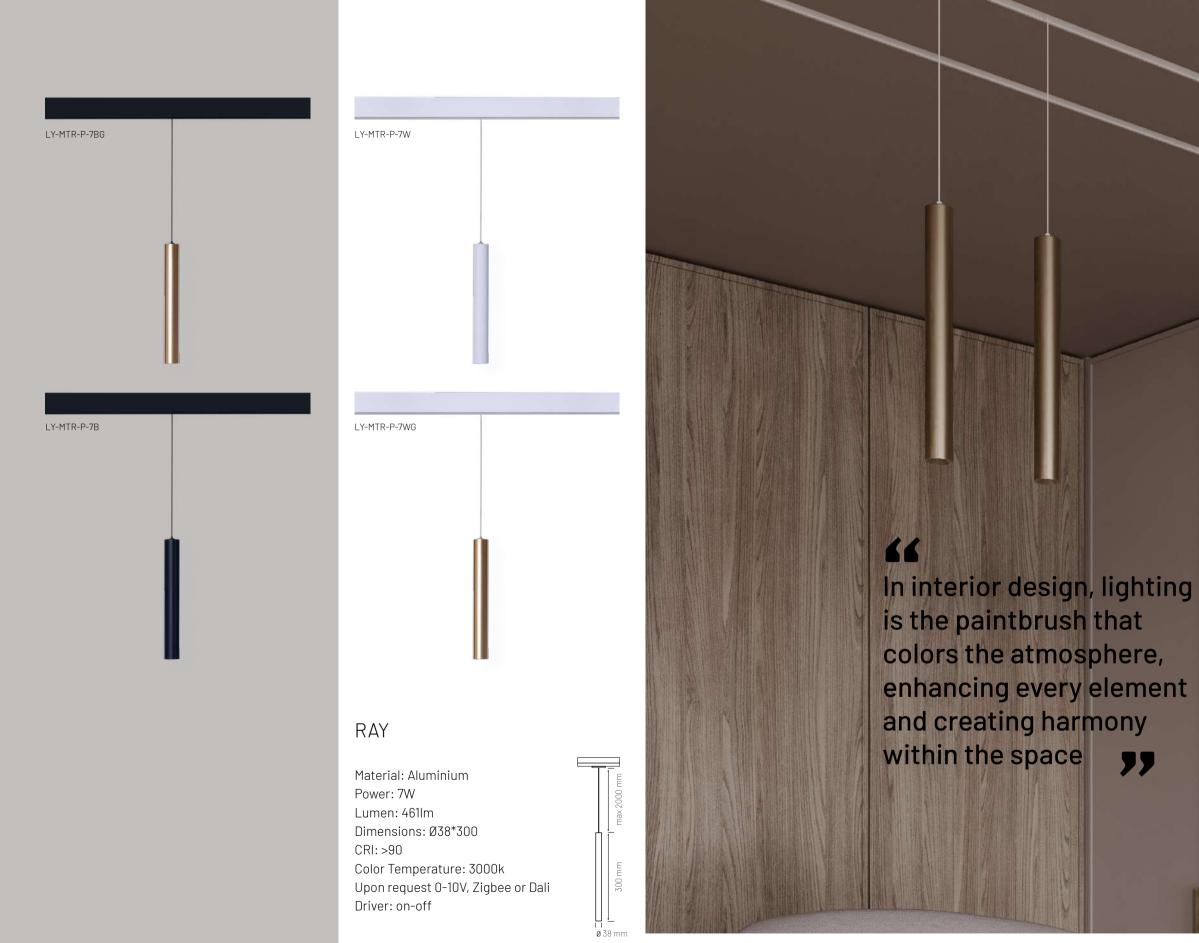

114 | L Y S E T lighting catalogue | 115



### MOON


Acrylic White
Watt: 8 W
Volt: DC48V
Lumen: 600 Lm
Beam Angle: 360°
CRI: ≥80
Kelvin: 3000K

IP20 Driver: ON-OFF

Upon request 0-10V, Zigbee or Dali

Dimension:130x130

LY-MTR-8-B1



Use straightforward geometry to give the design a cosmic look







INPUT MODULE



PROFILE ELECTRIC CONNECTOR



LY-INTRACK100 LY-INTRACK250

IN TRACK DRIVER 100w • 250W

LY-MTR-CWSW



"L" CONNECTOR

FOR SURFACE



"L" CONNECTOR FOR RECESSED





LY-MTR-CWSB

CEILING-WALL CONNECTOR FOR SURFACE











ENDCAP SURFACE

**ENDCAP** RECESSED










LINEAR MECHANIC RECESSED CONNECTOR



LY-MTR-ICSW


LINEAR MECHANIC SURFACE CONNECTOR

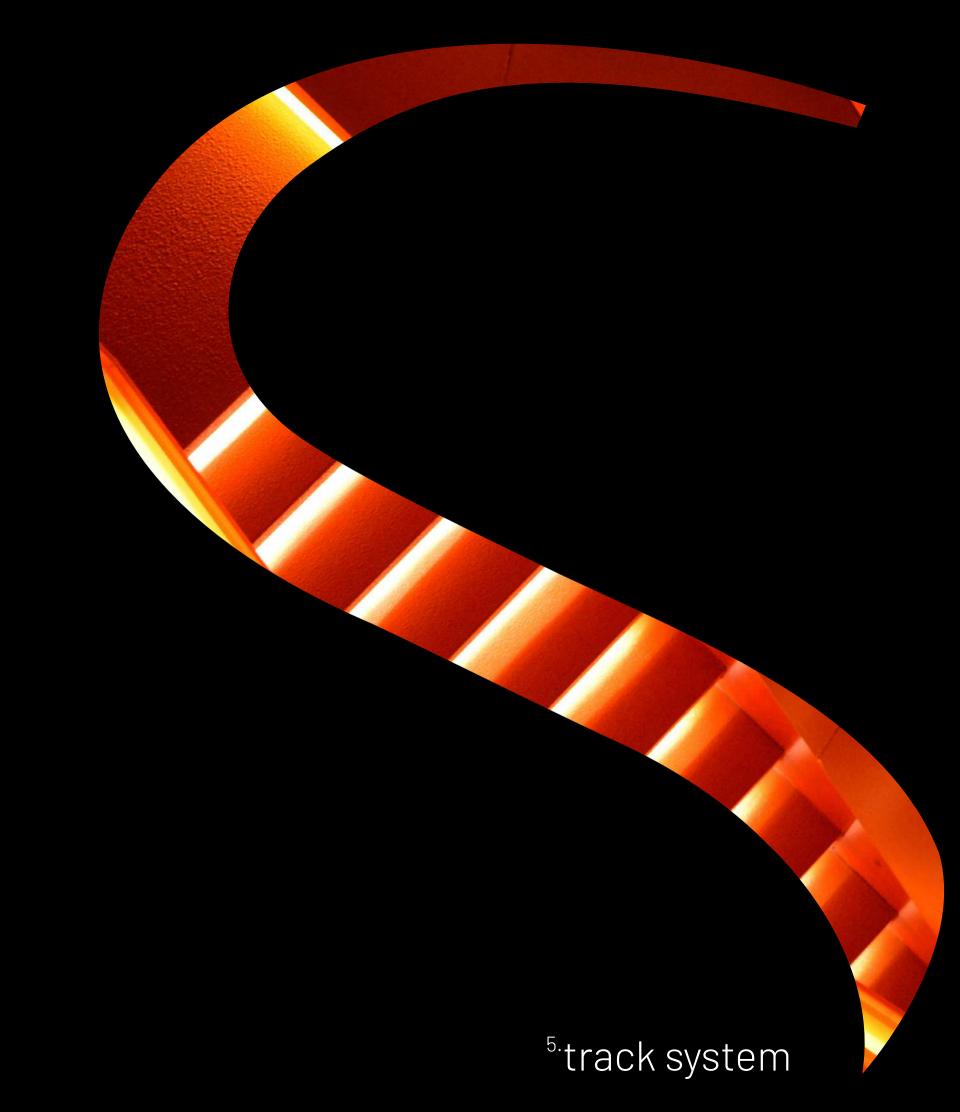



### Track rail

Sandy Black Aluminium
Sandy White Aluminium
2 Wires
Dimesions:L2000xW340xH210mm







### KER



Sandy Black Aluminium Sandy White Aluminium Volt: 220V IP20 GU10 max. 10W Dimensions: Ø6xH13cm










### ARM

Sandy Black Aluminium
Sandy White Aluminium
Volt: 220V
IP20
GU10 max. 10W
Dimensions: Ø5,3xH20cm











### LOKUS

Sandy Black Aluminium
Sandy White Aluminium
Sandy Gold Aluminium+black
Sandy Gold Aluminium+white
Volt: 220V
IP20

GU10 max. 10W

Dimensions: Ø5,2xH9,2cm



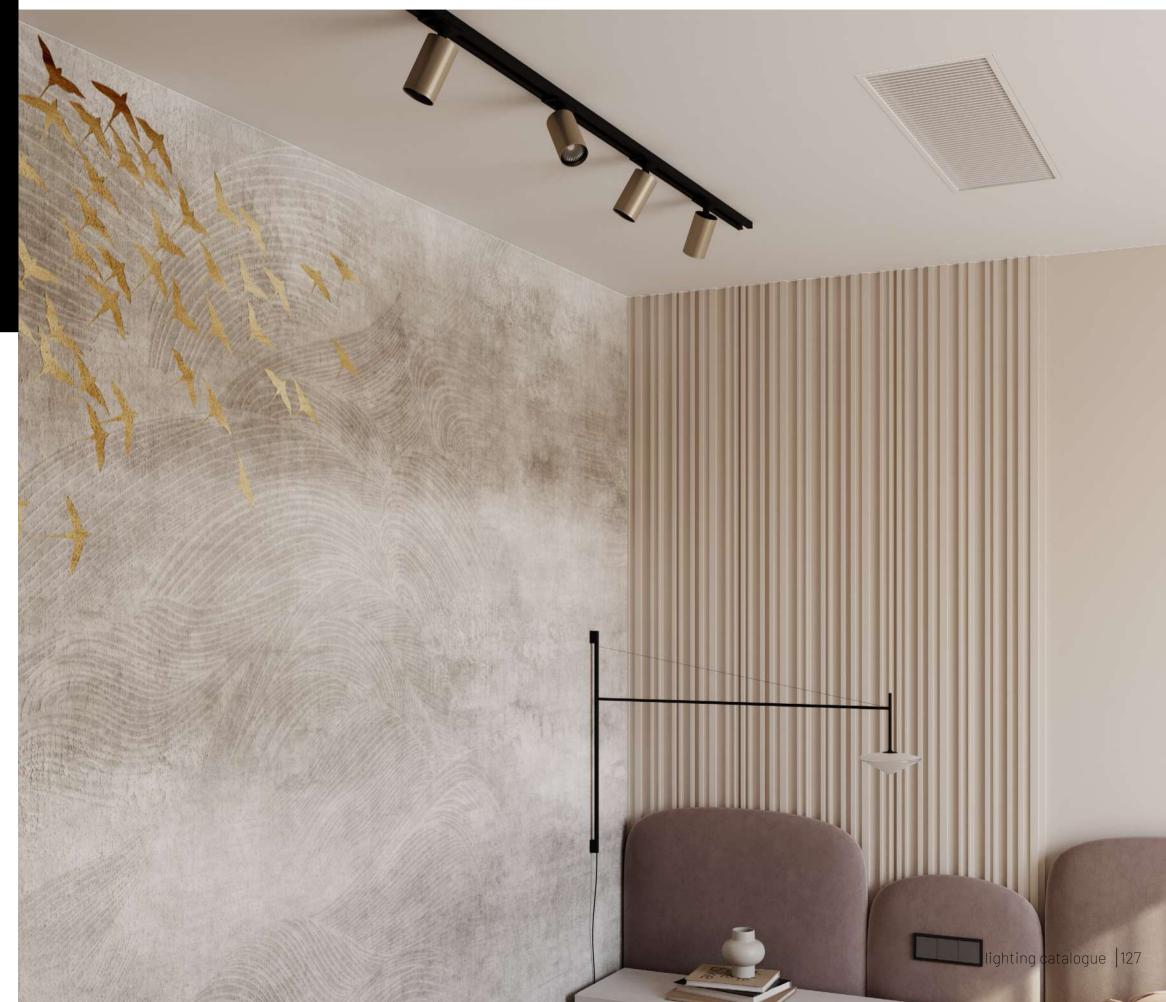





### LIVE END CONNECTOR



### "L" CONNECTOR



"T" CONNECTOR





LINEAR CONNECTOR



Use the track and the selected spots to highlight the most appealing aspects of your project "







### TUBE

Sandy White Aluminium Volt: 220V IP20 GU10 max. 10W Dimensions: Ø5,5xH15cm



" To complement any modern home décor, we offer downlights in a variety of styles, from sleek modern designs to pointed spotlights 77





LY10-12B



# FOLD 8,5

Sandy Black Aluminium Volt: 24V IP20 12W

Lumen:950lm Kelvin: 3000K

Dimensions: Ø8,5xH7,8cm





### FOLD 12

Sandy White Aluminium Volt: 24V

IP20 18W

Lumen:1250lm Kelvin: 3000K

Dimensions: Ø12xH8,2cm











### RIN

Sandy Black Aluminium Sandy White Aluminium Volt: 220V IP20 GU10 max. 10W Dimensions: Ø8,5xH11,5cm



LY28-GU10W




### PLUMP

Sandy Black Aluminium Sandy White Aluminium Volt: 220V IP20 GU10 max. 10W

Dimensions: Ø7,5xH9cm



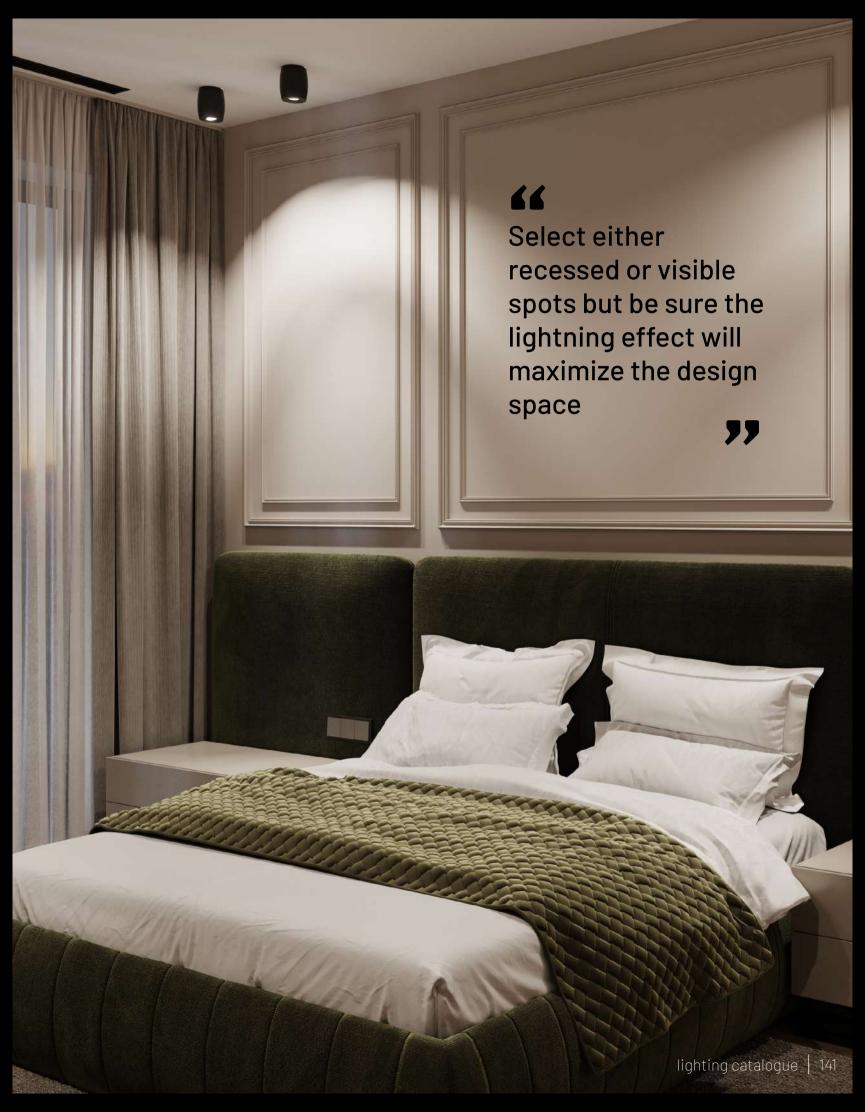


















142 | L Y S E T



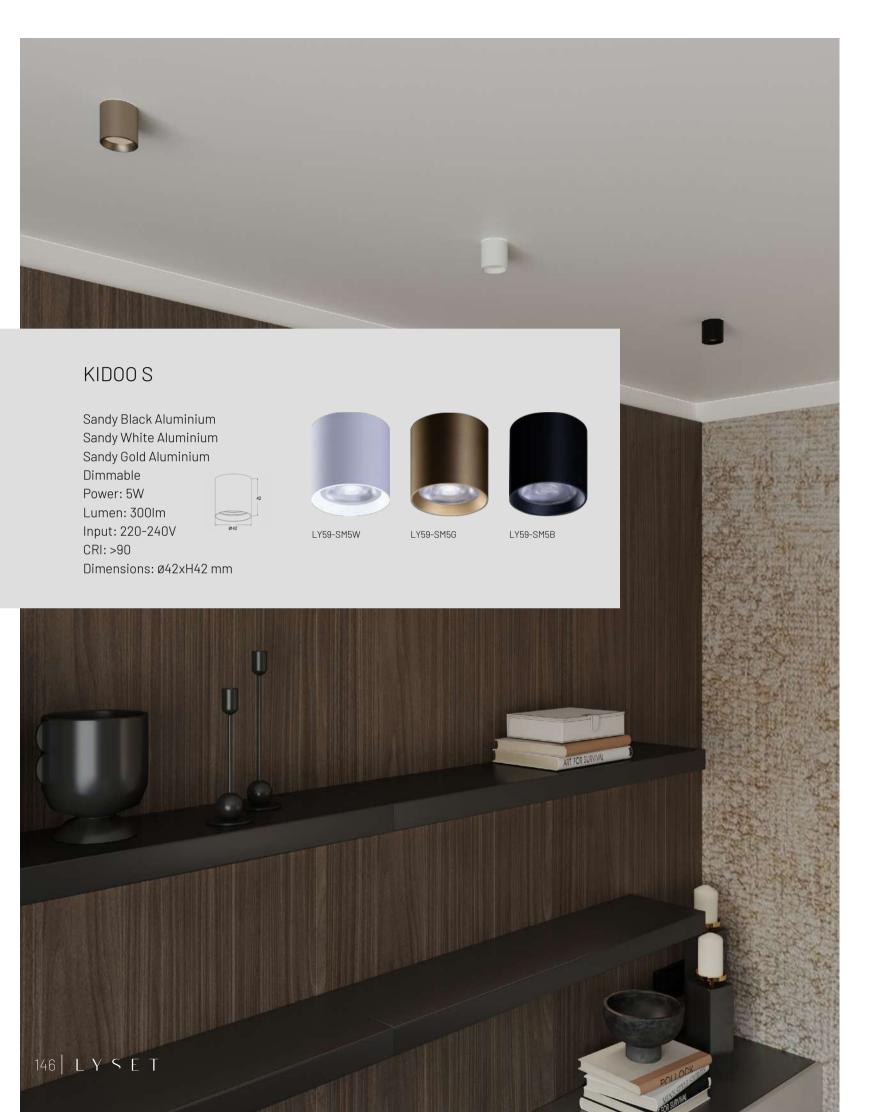



### KIDOO M

Sandy Black Aluminium Sandy White Aluminium Sandy Gold Aluminium Dimmable

Power: 10W Lumen: 600lm Input: 220-240V

CRI: >90


Dimensions: Ø55xH55 mm







LY59-SM10B

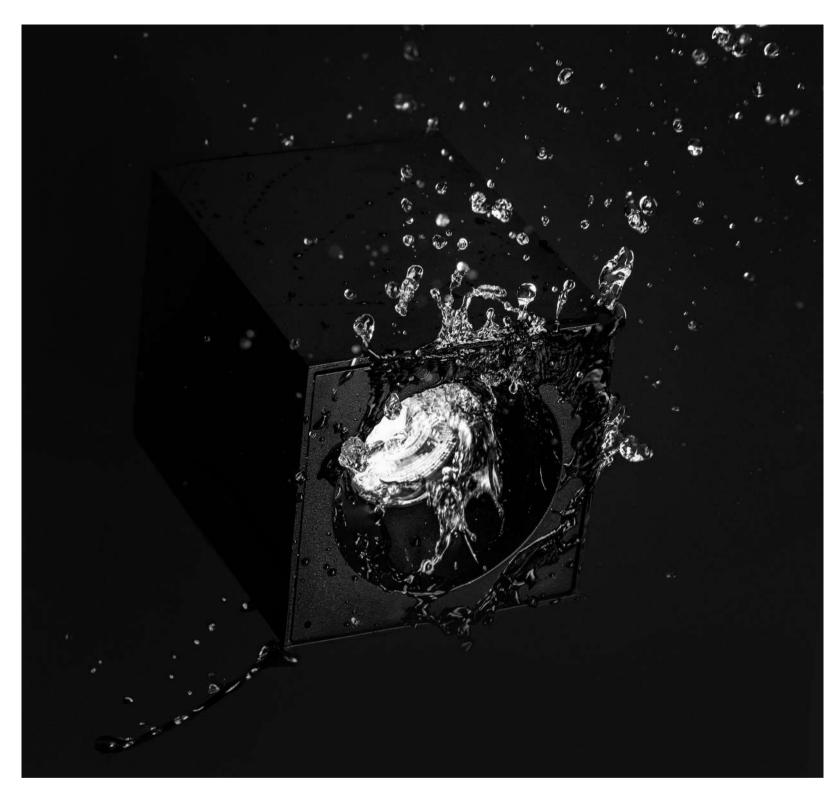



# WETR Material: Aluminium

IP65 GU10 max. 10W Dimensions: 8,5×11,5cm












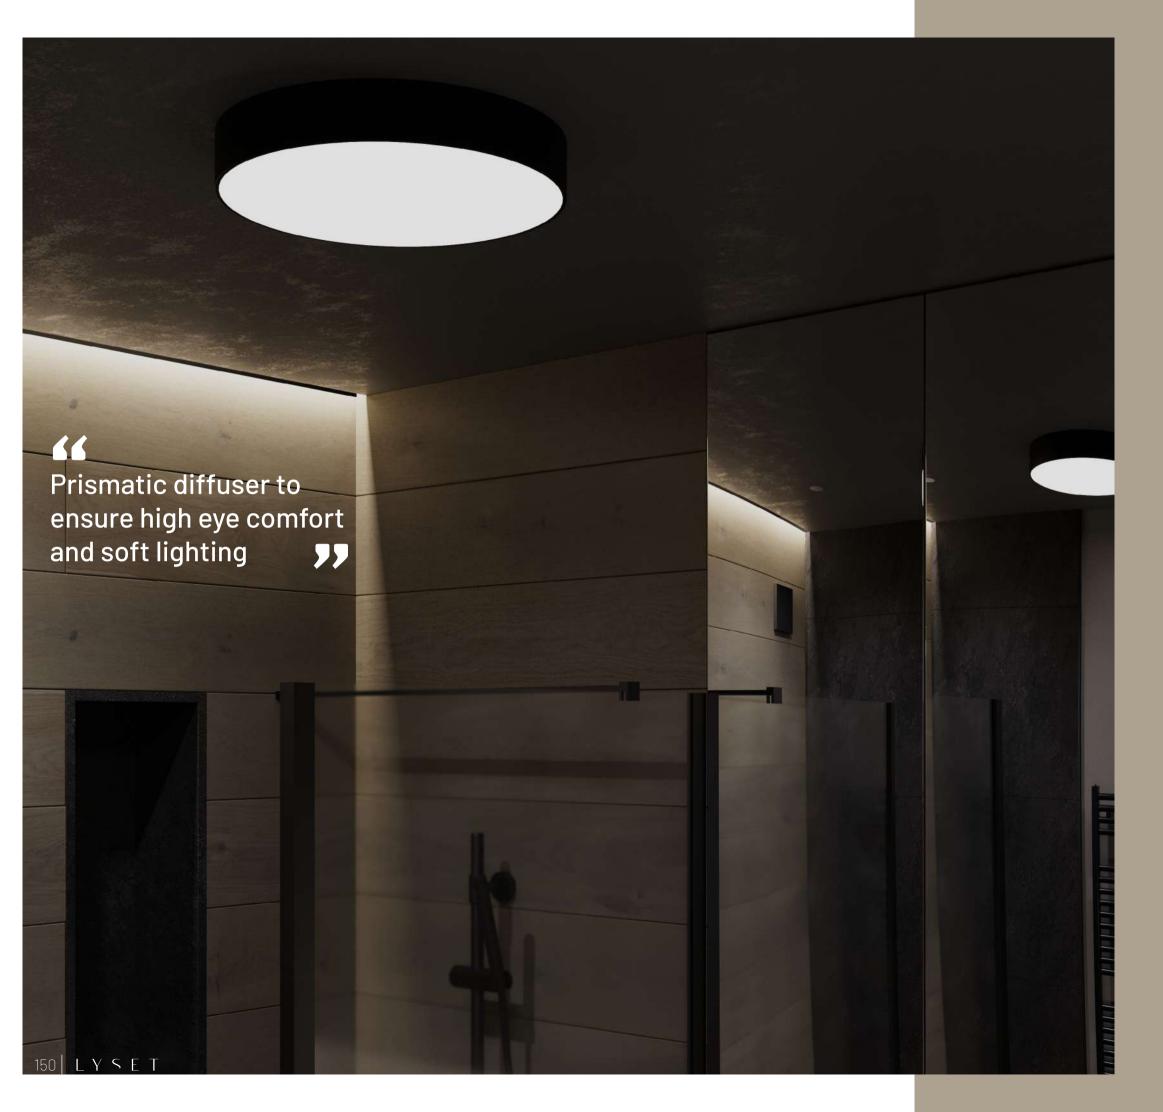



### RAV CEILING 40

Interchangeable 3000k and 4000k by button

Dimmable

sizes: 400 mm diameter Sandy Black

Power: 30W





### RAV CEILING 60

Interchangeable 3000k and 4000k by button

Dimmable


sizes: 600 mm diameter

Sandy White Power: 50W

LY61-C6050B

IP44



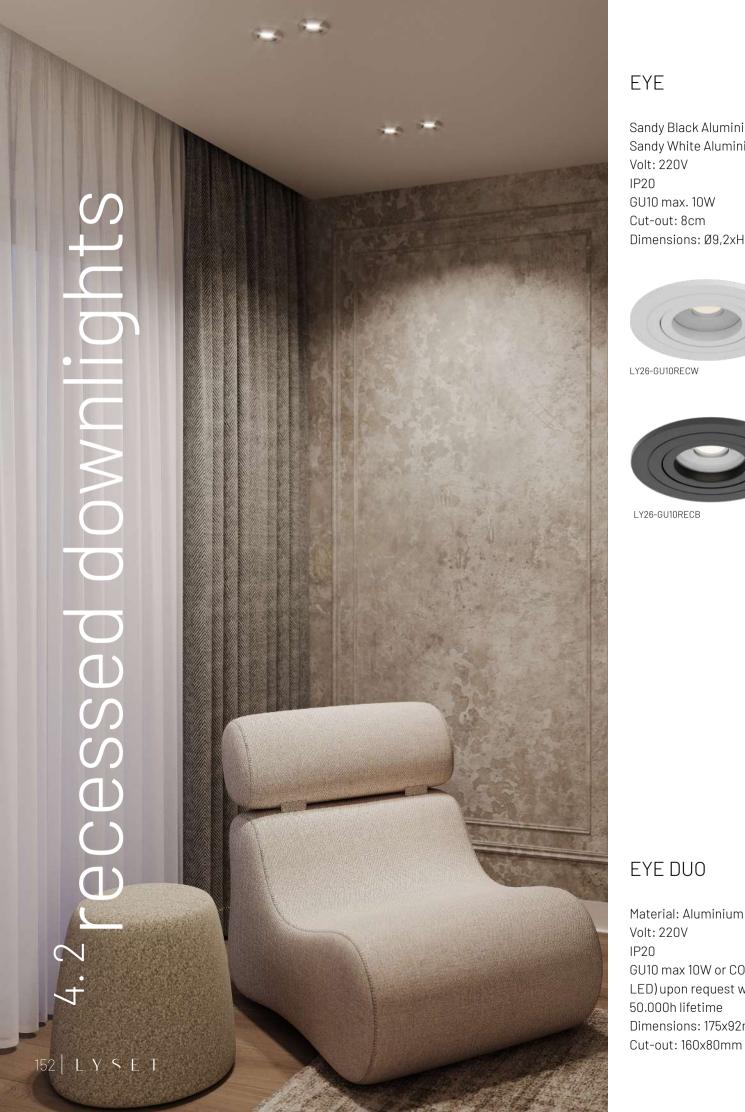

### EYE

Sandy Black Aluminium Sandy White Aluminium Volt: 220V IP20 GU10 max. 10W Cut-out: 8cm Dimensions: Ø9,2xH2,5cm




LY26-GU10RECW



LY26-GU10RECB

### EYE DUO


Material: Aluminium Volt: 220V IP20 GU10 max 10W or COB (integrated LED) upon request with CRI >90 and 50.000h lifetime Dimensions: 175x92mm

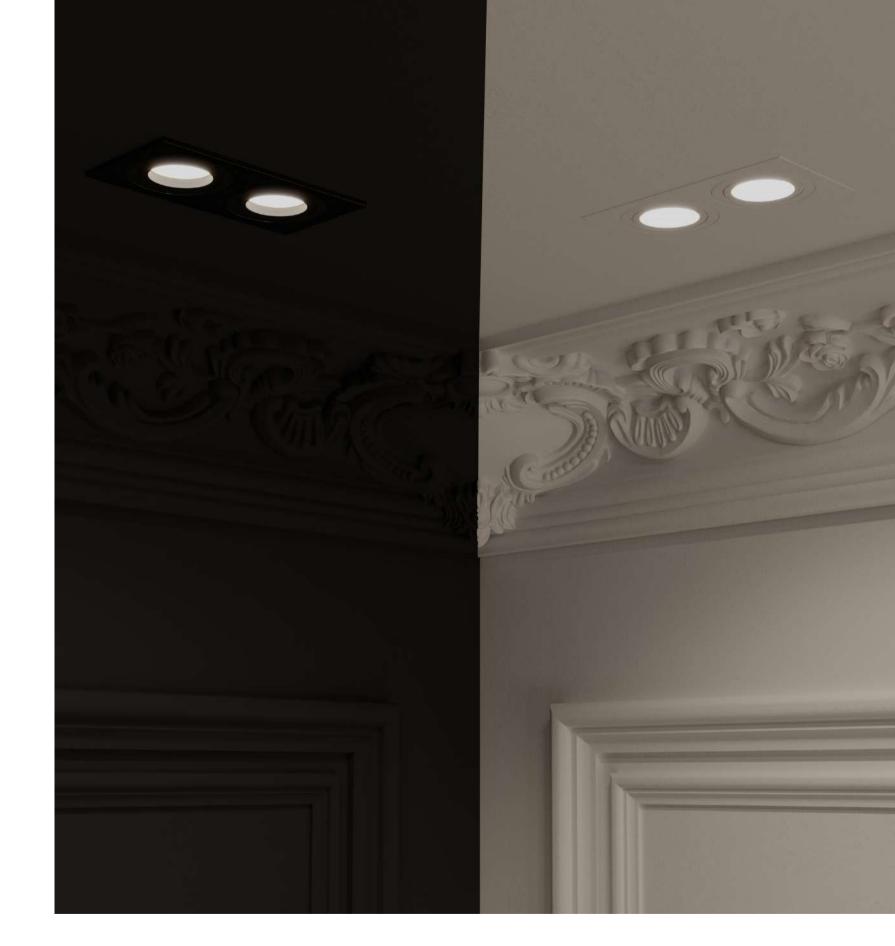





lighting catalogue | 153 LY26-2GU10RECB LY26-2GU10RECW

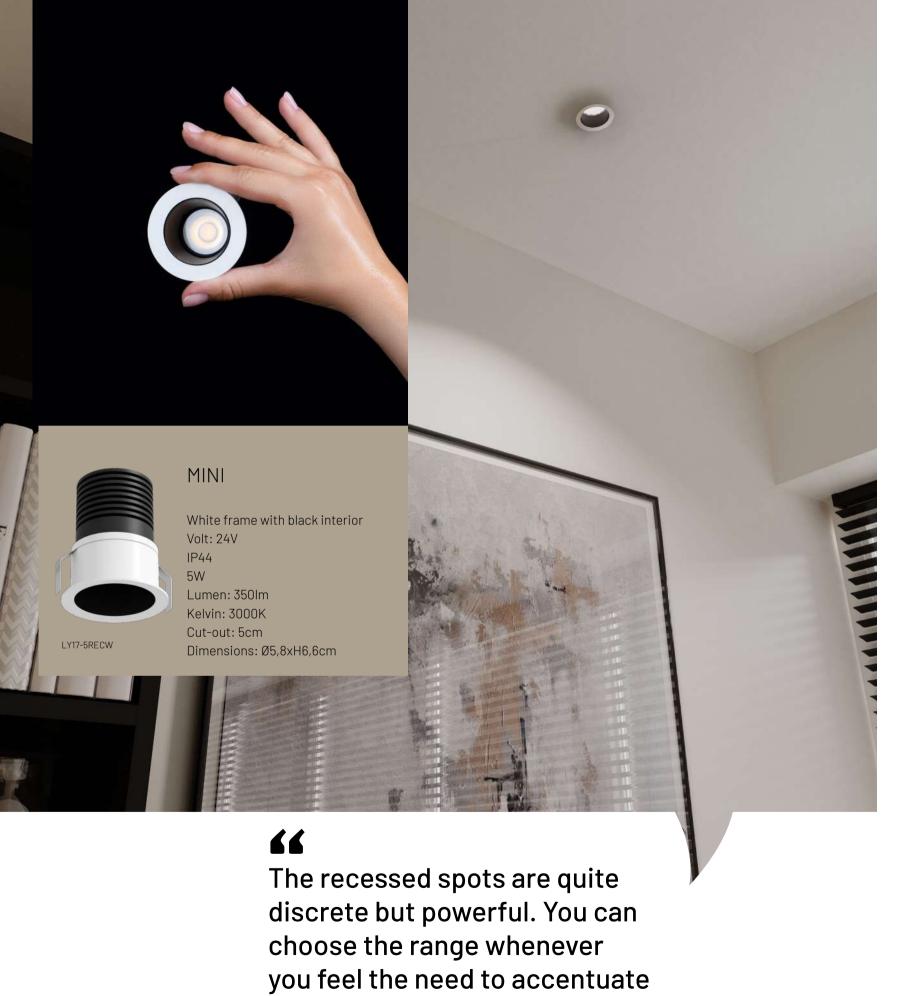

but not overpower the design



### ATOM 8,5

LY18-8RECW

Sandy White Aluminium Volt: 24V IP44 8W

Lumen: 560lm Kelvin: 3000/4000/6500K

Cut-out: 7,5cm

Dimensions: Ø8,5xH3,6cm

73









### ORA

Sandy White Aluminium Sandy Black Aluminium Volt: 24V IP44 10W Lumen: 900Im Kelvin: 3000K

Cut-out: 7,5cm Dimensions: Ø9xH5cm





### POWER

Sandy White Aluminium Sandy Black Aluminium Volt: 24V IP44 12W Lumen: 960Im Kelvin: 3000K

Cut-out: 7,5cm Dimensions: Ø8,5xH8,3cm





LY25-5RECW

Sandy White Aluminium

Volt: 24V IP20 5W

Lumen: 450lm Kelvin: 3000K Cut-out: 4,5cm

Dimensions: Ø5,5xH3,8cm



LY25-10RECW

Sandy White Aluminium

Volt: 24V IP20 Watt:10W Lumen: 900Im Kelvin: 3000K Cut-out: 7,5cm

Dimensions: Ø8,2xH4,0cm





### HONEY 8,5

LY23-7RECB

Sandy Black Aluminium, Glossy Reflector/Matt Reflector

Volt: 24V IP20 7W

Lumen: 630lm Kelvin: 3000K Cut-out: 7,5cm

Dimensions: Ø8,5xH4,4cm



# PICK

Material: Aluminium Power: 10W

Lumen: 760lm CRI: >90

IP20 Driver: on-off Beam angle: 36°

Dimensions: Ø92\*L90, tube Ø39

Cut-out: Ø85





### TICK M

Material: Aluminium Power: 10W Lumen: 760lm

CRI: >90 Driver: on-off

Color Temperature: 3000k

Beam Angle: 36°

IP40



### TICK S

Material: Aluminium

Power: 5W Lumen: 300lm CRI: >90 Driver: On/off

Color Temperature: 3000k

Beam Angle: 36°

IP40










LY45-GU10CB




LY45-GU10CWB



LY45-GU10CBG

## EIKO

Material: Aluminium+Plastic GU10 max. 10W Dimensions: 85x85xH45mm (without bulb) Cut-out: 80x80mm IP20

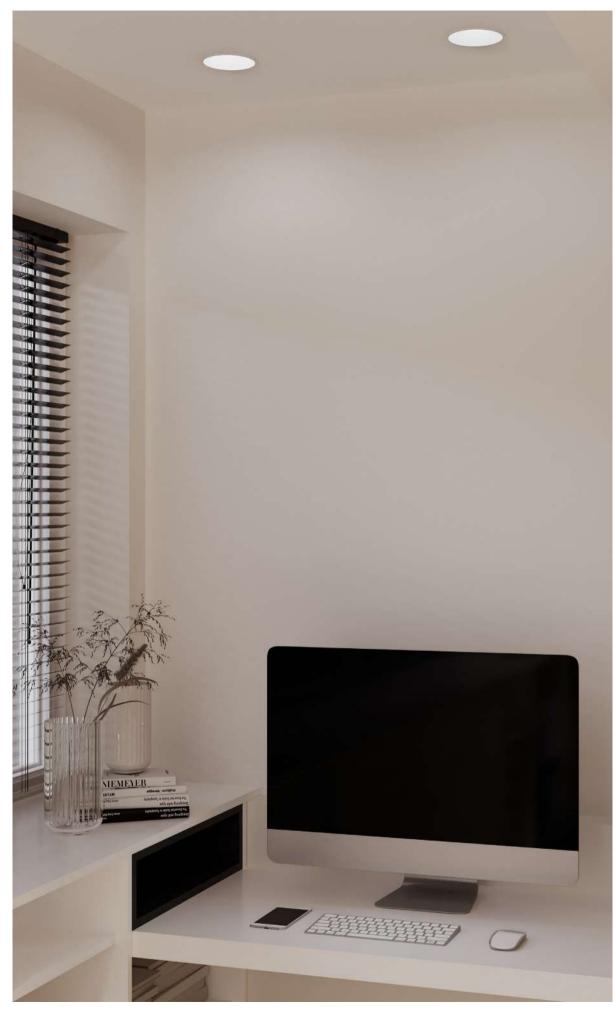



LY16-10RECW

## DEEP

Sandy White Aluminium Volt: 24V

IP20 10W

> Lumen: 700lm Kelvin: 3000K Cut-out: 9,5cm

Dimensions: Ø10,3xH5cm



Dimensions: ø125 including

trimless profile

# FLEX TRIMLESS

Material: Aluminium

Power: 9W Lumen: 540lm

IP40 CRI: >90

Color Temperature: 3000k, upon request 4000k Beam angle: 36°, upon request 15° or 24° Driver: On-off, upon request 0-10V, Triac or Dali







### GYPSUM SPOTLIGHT A

Material: Gypsum
GU10 max. 10W
Dimonsions: @100xH40 (withoutlise

Dimensions: Ø100xH40 (withoutlight bulb)

Cut-out: IP20



LY64-DGY100

### GYPSUM SPOTLIGHT B

Material: Gypsum GU10 max. 10W

Dimensions: Ø120xH30 (without light bulb)

Cut-out: IP20

LY65-DGY120




### GYPSUM SPOTLIGHT C

Material: Gypsum GU10 max. 10W Dimensions: ø100xH30 (without light bulb)

Cut-out: IP20

LY66-DGY100



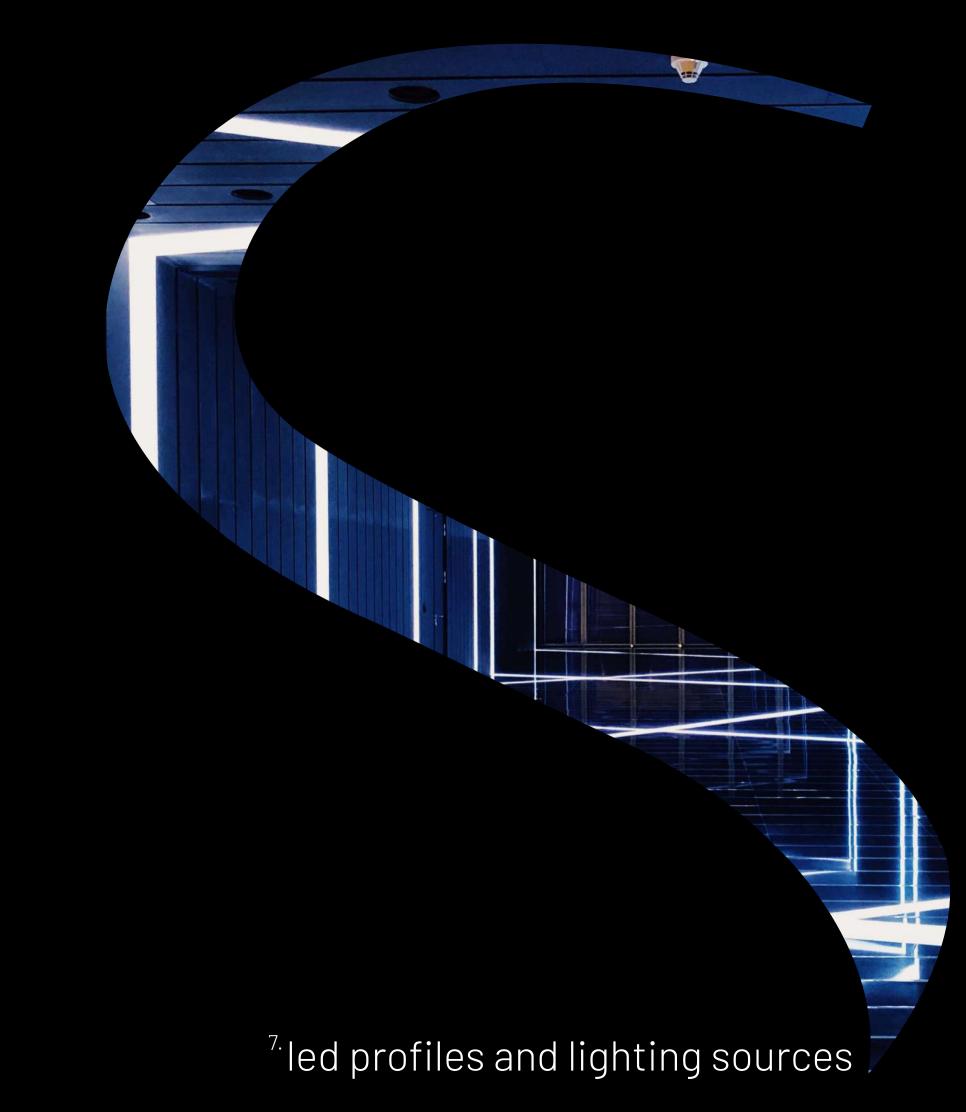



## RECESSED LED PROFILES

Color: silver Code: LY-LPR15

Material: aluminiu

Dimensions: L: 2000mm, Width: 15mm, Height: 15mm, recessed height: 10,5mm

#### LY-LPR15



## ACCESORIES







L connector


linear connector

verticalhorizontal connector

# PER TO STREET OF STREET (A) (本年) (A) (本年) (A) (本年) (A) (A) (A) STRIP LED PRO 24V LED qty/m: 160pcs Length: 5 meter roll Width: 8mm CRI: <90 Lumen: 122lm/w for 3000k 27lm/w for 4000k Power: 4,5W/m, 6W/m, 8W/m, 12W/m Color temp 3000k / 4000k Waterproof IP65 rating for 12W/m STRIP LED PRO 48V LED qty/m: 160pcs Cutting unit: 4leds/25mm Length: 5 meter roll Width: 10mm for 12W and 8W 4mm for 4,3W CRI: <90 Lumen: 95lm/w Power: 4,3W/m, 8W/m, 12W/m Lifespan over 60000h 172 LYSET

#### SURFACE LED PROFILE

Black Anodized Aluminium
White Anodized Aluminium
Dimensions: L2000 X W17,4 X H8,2 mm

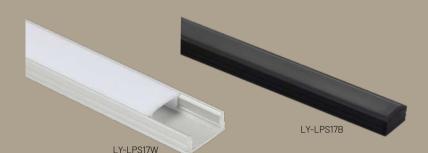

### SURFACE LED PROFILE 12

Black Anodized Aluminium White Anodized Aluminium Dimensions: L1000 X W12 X H8 mm L2000 X W12 X H8 mm L3000 X W12 X H8 mm



## SURFACE LED PROFILE 8

Black Anodized Aluminium
White Anodized Aluminium
Dimensions: L2000 X W8 X H7,5 mm



# SEMI-RECESSED LED PROFILE

Material: Aluminium Prismatic diffuser Sizes: 11xH10mm

Internal size for strip led: 5.5mm

Length: 2000mm



# INTERNAL CORNER RECESSED LED PROFILE


Material: Aluminium Prismatic Diffuser Length: 2000mm



# EXTERNAL CORNER RECESSED LED PROFILE

Material: Aluminium Prismatic Diffuser Length: 2000mm



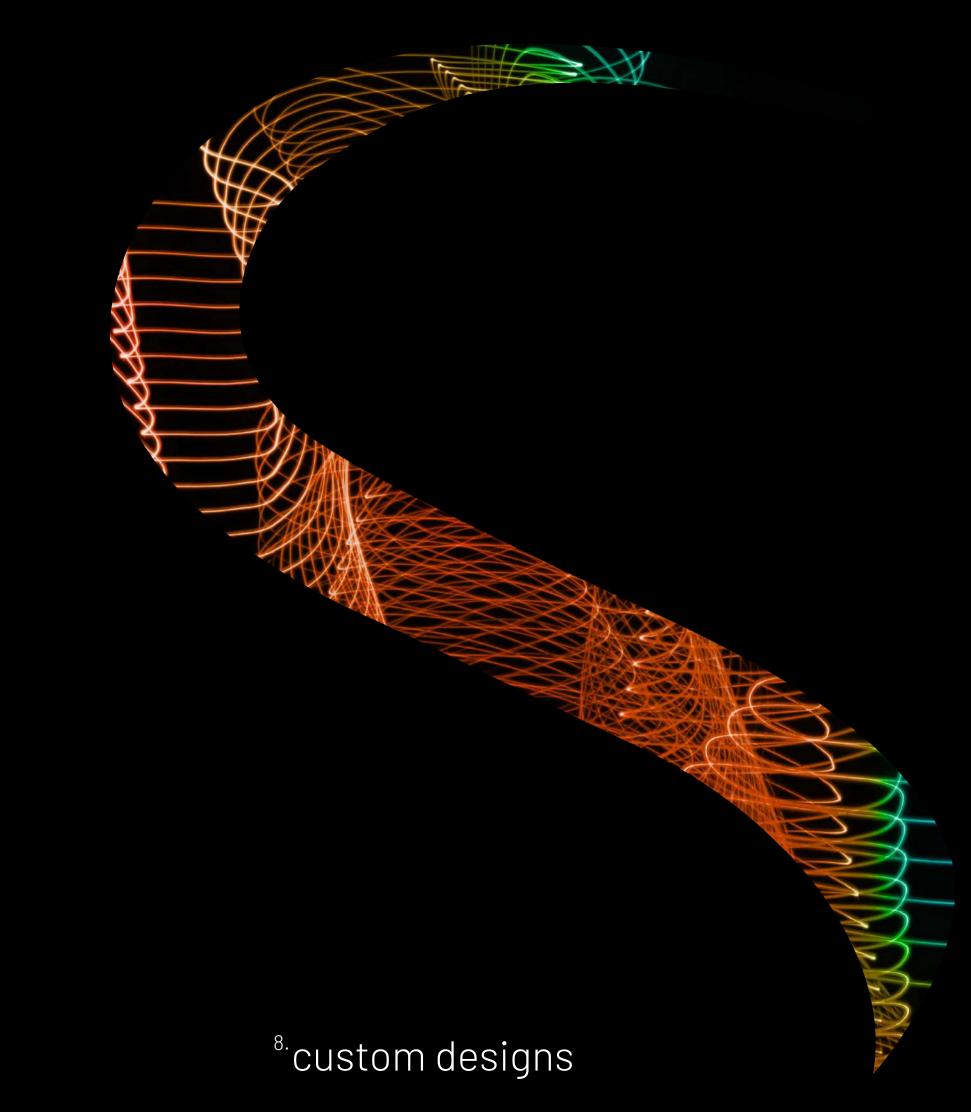



## 44

Discover the magic of personalized illumination with our custom light design services.

Whether you're envisioning a unique ambiance for your home or a standout feature for your business, we are here to bring your creative ideas to life. Transform any space with bespoke lighting solutions tailored to your style and needs.

"

176 LYSET lighting catalogue | 177







Thank you for reading our catalogue. To ensure that you can deliver the best projects to your clients, we will gladly assist you in any way we can. We are happy to help you with your creative projects because interior design is always a great ride. You can get in touch with us over the phone or online with just one click. Share the catalog with a colleague; we will be happy to consider recommendations.

Interior design and 3D visualisation in this catalog were made with the suport of interior Arhitect Iuliana Marus which we highly recommend.

We are grateful to the outstanding Inoveo team for guiding us in uncovering the essence of our brand.

See you soon, Carmen & Alexandru